


FLEXZILLA®

PREMIUM HOSES, TOOLS & EQUIPMENT



AIR



WATER



POWER



LUBE

If it's not ZillaGreen™, it's not Flexzilla®



THE FLEXZILLA® EDGE

Giving you the edge you deserve.

You work hard to get where you are in life. When it's time to choose the tools that help get you there, you deserve something that's above the ordinary. Tools that give you the edge you need to complete your projects faster, easier and with more satisfaction at the end of the day. You deserve Flexzilla hoses, tools and equipment.

**It's the difference between ordinary tools
and the innovative thinking designed
into every Flexzilla product.**

We take conventional tool ideas and rethink the work experience. The result is premium air, water and power tools that pull their weight and always put you a step ahead.

Experience it for yourself.

See how the innovative details we put into our tools make all the difference. Whether you're a professional or do-it-yourselfer, working with Flexzilla tools doesn't feel like work.

FLEXZILLA[®] by

lego

CONTENTS



7 Air Hoses

Air Hose Assemblies	8	Pro Custom Hose Centers	13-14
Air Hose Kits	9-10	Pro Reusable Fittings and Splicers	15
Whip Hose Assemblies	10	Bulk Air and Water Hose	15
Polyurethane Recoil Hose	11	Pro Air Hose Assemblies	16
Crimpers and Dies	11	Pro Air Hose Kits	17
Pro Custom Air Hose	12	Pro Custom Length Whip Hoses	17

18 Air Hose Reels

Retractable Air Hose Reels with Levelwind™ Technology	19	Retractable Air Hose Reels - Single Arm, Open Face	23
Mounting Brackets	19	Manual Air Hose Reels	24
Retractable Air Hose Reels	20	Manual Air Hose Reels - Fixed, Heavy-Duty	25
Retractable Air Hose Reels - Single Axle Arm Support	21	Manual Air Hose Reels - Portable	26
Retractable Air Hose Reels - Dual Axle Arm Support	22	Lead-In Hoses	27

28 Air Line Accessories

Pro High Flow Couplers and Plugs	29-30	Pro High Flow Coupler and Plug Kits	31
--	-------	---	----

32 Blow Guns

Modular Blow Guns	33	Modular Blow Guns Accessories System	34
Modular Blow Gun Kits	33		

35 Air Tools

Pro Mini Impact Wrench Kit	36	Pro Reciprocating Mini Air Saw Kit	37
Pro Mini Impact Wrench	36	Mini Impact Wrench Kit	38
Pro Reactionless Mini Air Ratchet Kit	37	Reactionless Mini Air Ratchet Kit	38

39 Tire Maintenance

Tire Inflators	40	Truck Tire Inflator Kit	40
--------------------------	----	-----------------------------------	----

WATER

Water Hoses

41

SwivelGrip™ Garden and Lead-in Hose Assemblies	42	Retractable Water Hose Reel with Levelwind Technology	49
SwivelGrip Garden Hose Merchandiser and Quarter Pallets	43	Mounting Brackets	49
Colors™ SwivelGrip Garden Hose Assemblies	43	Pressure Washer Hose Assemblies	50
Garden and Lead-in Hose Assemblies	44	Pressure Washer Quick Connect Couplers and Plugs	51
Garden Hose Kit with Quick Connect Attachments	45	Pressure Washer Screw Couplers	51
3-Piece Nozzle Kit with Quick Connections	45	Pressure Washer Swivel Coupling and Nipples	51
Pro Custom Water Hose	46	Pressure Washer Spray Guns and Handles	52
Pro Custom Hose Centers	47-48	Pressure Washer Nozzle Kit	52
Pro Water Hose Assemblies	48	Pressure Washer Lances	52
Pro Water Hose Nozzles	48		

POWER

Extension Cords

53

Pro Extension Cords	54	Retractable Extension Cord Reel	55
-------------------------------	----	---	----

LUBE

Greasing Equipment

56

20V Cordless Grease Gun Kit	57	Grease Hoses	58
Lever Action Grease Gun	58		

Plan-O-Grams & Part Number Index

59

Plan-O-Grams	60-64	Part Number Index	65-66
------------------------	-------	-----------------------------	-------

ICONS

ICONS THROUGHOUT THE CATALOG IDENTIFY FLEXZILLA® FEATURES AND BENEFITS



Flexzilla® Air Hose

FEATURES:

- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
- Includes bend restrictors to reduce wear and tear, prolonging the life of the hose



Flexzilla® Water Hose

FEATURES:

- Extreme all-weather flexibility
- Won't kink under pressure
- Lightweight, coils easily
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Leak-free O-rings
- Max. working pressure at 70°F: 150 psi
- 3/4 in. - 1 1/2" GHT fittings



ColorConnex® Couplers & Plugs

ColorConnex is a patented system that allows color-to-color matching of couplers and plugs among the standard pneumatic interchanges.

- Industrial (Type D): Red
- Automotive (Type C): Blue
- ARO (Type B): Green

By using ColorConnex to dedicate line use, you can ensure you never use a lubricated line for a dry line application, preventing cross contamination.

- Match coupler and plug types
- Dedicate hose applications



Flexzilla® Pro Air Hose

FEATURES:

- Field Repairable – Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose



Flexzilla® Pro Water Hose

FEATURES:

- Field Repairable – Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility
- Lightweight, coils easily
- Won't kink under pressure
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Leak-free O-rings
- Max. working pressure at 70°F: 150 psi
- 3/4 in. - 1 1/2" GHT fittings
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose



Flexzilla® Pro High Flow Couplers and Plugs

Flexzilla Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. Don't Starve Your Air Tool!

- Push-To-Connect
- Ideal for spray guns and impact tools
- Increased efficiency
- Maximum Torque
- Maximum RPM
- Best Performance

Flexzilla® Pro

Flexzilla Pro Products are designed with the professional in mind



Drinking Water Safe

The Flexible Hybrid Polymer inner tube material makes many of our hoses drinking water safe



FLEXIBLE HYBRID POLYMER

Flexzilla® hoses have a durable, abrasion-resistant outer cover.

WON'T KINK UNDER PRESSURE

Lightweight and easy to handle, Flexzilla hose lays flat, has no memory and won't kink under pressure.

AIR HOSES

EXTREME ALL-WEATHER FLEXIBILITY

Flexzilla hose offers extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F).



Air Hose Assemblies



Flexzilla® is a revolutionary hose featuring a Flexible Hybrid Polymer material that redefines flexibility. This engineered polymer-blend material permits use in environments where general purpose PVC and rubber hose may become too stiff. Flexzilla hose characteristics offer zero memory allowing it to lay flat. It won't work against you during operation and coils easily after use. Flexzilla offers extreme all-weather flexibility, even in subzero conditions, and is ideal in both hot and cold environments where tight radius bends are needed.



HFZ38100YW2

CLICK HERE
to see Flexzilla® Air Hose in action!

FEATURES:

- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
- Includes bend restrictors to reduce wear and tear, prolonging the life of the hose



HFZ1450YW2

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZ1425YW2	25 ft.	1/4 in.	1/4 in. MNPT	●
HFZ1450YW2	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZ1450YW2-10X	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZ14100YW2	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZ3825YW2	25 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3825YW2-10X	25 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3835YW2	35 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3850YW2	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3850YW2-10X	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3850YW3	50 ft.	3/8 in.	3/8 in. MNPT	-
HFZ38100YW2	100 ft.	3/8 in.	1/4 in. MNPT	●
HFZ1225YW3	25 ft.	1/2 in.	3/8 in. MNPT	●
HFZ1250YW3	50 ft.	1/2 in.	3/8 in. MNPT	●
HFZ1250YW4	50 ft.	1/2 in.	1/2 in. MNPT	-
HFZ12100YW3	100 ft.	1/2 in.	3/8 in. MNPT	●
HFZ12100YW4	100 ft.	1/2 in.	1/2 in. MNPT	-

Part No.'s with -10X suffix include 10 hose assemblies in a retail merchandiser display



HFZ1450YW2-10X

Air Hose Kits – Include Hose, Coupler, and Plug



This convenient hose kit features the revolutionary Flexzilla® air hose paired with a Red Industrial (Type D) 1/4 in. body ColorConnex® coupler and plug set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the job site.

KIT INCLUDES:

- Flexzilla Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- Pre-Sealed Threads



HFZ3850YW2-D-10X

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZ1425YW2-D	25 ft.	1/4 in.	1/4 in. MNPT	●
HFZ1450YW2-D	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZ1450YW2-D-10X	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZ14100YW2-D	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZ14100YW2-D-10X	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZ3825YW2-D	25 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3835YW2-D	35 ft.	3/8 in.	1/4 in. MNPT	●
HFZ3850YW2-D	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZ38100YW2-D	100 ft.	3/8 in.	1/4 in. MNPT	●

Part No.'s with -10X suffix include 10 hose assemblies in a retail merchandiser display



HFZ38100YW2-D

Air Hose Kit – Includes Hose, Blow Gun and Accessories



11-Piece Air Compressor Kit

KIT INCLUDES:

- a - (1) Flexzilla Air Hose, 50 ft. x 3/8 in.
- b - (1) Blow Gun with safety tip
- c - (1) Ball Foot Chuck
- d - (1) Pencil Tire Pressure Gauge (10 to 100 psi)
- e - (1) Coupler, 1/4 in. FNPT
- f - (1) Coupler, 1/4 in. MNPT
- g - (2) Plugs, 1/4 in. FNPT
- h - (3) Plugs, 1/4 in. MNPT



HFZCLB11D



HFZCLB11D

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZCLB11D	50 ft.	3/8 in.	1/4 in. NPT	●

Whip Hose Assemblies



WHY USE A WHIP HOSE?

- Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- Increases mobility in tight spaces
- Improves air tool ergonomics



HFZ3804YW2B

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZ1405YW2B	5 ft.	1/4 in.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	–
HFZ3802YW2B	2 ft.	3/8 in.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	●
HFZ3804YW2B	4 ft.	3/8 in.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	●
HFZ3805YW2B	5 ft.	3/8 in.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	–
HFZ3806YW2B	6 ft.	3/8 in.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	●
HFZ1202YW3S	2 ft.	1/2 in.	3/8 in. MNPT Swivel x 3/8 in. MNPT	–
HFZ1204YW3S	4 ft.	1/2 in.	3/8 in. MNPT Swivel x 3/8 in. MNPT	–
HFZ1206YW3S	6 ft.	1/2 in.	3/8 in. MNPT Swivel x 3/8 in. MNPT	–
HFZ1208YW3S	8 ft.	1/2 in.	3/8 in. MNPT Swivel x 3/8 in. MNPT	–
HFZ1202YW4S	2 ft.	1/2 in.	1/2 in. MNPT Swivel x 1/2 in. MNPT	–
HFZ1204YW4S	4 ft.	1/2 in.	1/2 in. MNPT Swivel x 1/2 in. MNPT	–
HFZ1206YW4S	6 ft.	1/2 in.	1/2 in. MNPT Swivel x 1/2 in. MNPT	–
HFZ1208YW4S	8 ft.	1/2 in.	1/2 in. MNPT Swivel x 1/2 in. MNPT	–

Polyurethane Recoil Hose

The Flexzilla® revolution continues with the Flexzilla polyurethane recoil air hose. Flexzilla recoil air hose exhibits extreme, all-weather flexibility and outperforms nylon hose. Plus, with the field repairable fittings, damaged hose can be repaired quickly, using tools commonly available on the jobsite.

FEATURES:

- Extreme all-weather flexibility (-40° to 165°F)
- Polyurethane outperforms nylon:
 - More flexible
 - Will not become brittle over time
 - Better recoil memory
- Working pressure at 70°F: 120 psi
- 1/4 in. MNPT reusable ends
- Safety factor: 3:1
- Tool end: 16 in. tail with swivel fitting
- Compressor end: 8 in. tail with rigid fitting
- Pre-applied thread sealer

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
LP1410AFZ	10 ft.	1/4 in.	1/4 in. MNPT	●
LP1415AFZ	15 ft.	1/4 in.	1/4 in. MNPT	●
LP1420AFZ	20 ft.	1/4 in.	1/4 in. MNPT	●
LP1425AFZ	25 ft.	1/4 in.	1/4 in. MNPT	●



LP1415AFZ

Crimpers and Dies

Hose Crimper			
Part No.	Die Bore Size		Retail Packaging
A5	A5-1, A5-2, A5-3, A5-4FZ and A5-5FZ		–

Hose Crimper Dies			
Part No.	Die Size	Used For	Retail Packaging
A5-1	5/8 in.	Hose diameters .640 min - .671 max	–
A5-2	37/64 in.	3/8 in. Flexzilla® (For hose diameters .590 min - .625 max)	–
A5-3	17/32 in.	Hose diameters .540 min - .662 max	–
A5-4	31/64 in.	Hose diameters .490 min - .520 max	–
A5-8	3/4 in.	Hose diameters .750 min - .781 max	–



A5

Flexzilla® Pro Air Hose




Flexzilla® Pro Air Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application. The field repair and custom length hose process takes

3 EASY STEPS

✓ CUSTOM LENGTHS



1
CUT – Measure and cut desired length of hose at 90° angle.




2
INSTALL – Slide spiral fitting and nut onto hose. Push hose onto fitting until hose reaches threads.



3
TIGHTEN – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.

✓ FIELD REPAIRABLE



1
CUT – Cut damaged portion of hose at 90° angle. Slide fitting nuts onto hose.



2
INSTALL – Slide hose onto fitting until hose reaches threads.




3
TIGHTEN – Tighten fitting nuts until snug.

Custom Hose Centers



The Flexzilla® Pro Custom Hose Centers allow you to provide your customers with custom length hose assemblies. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site.

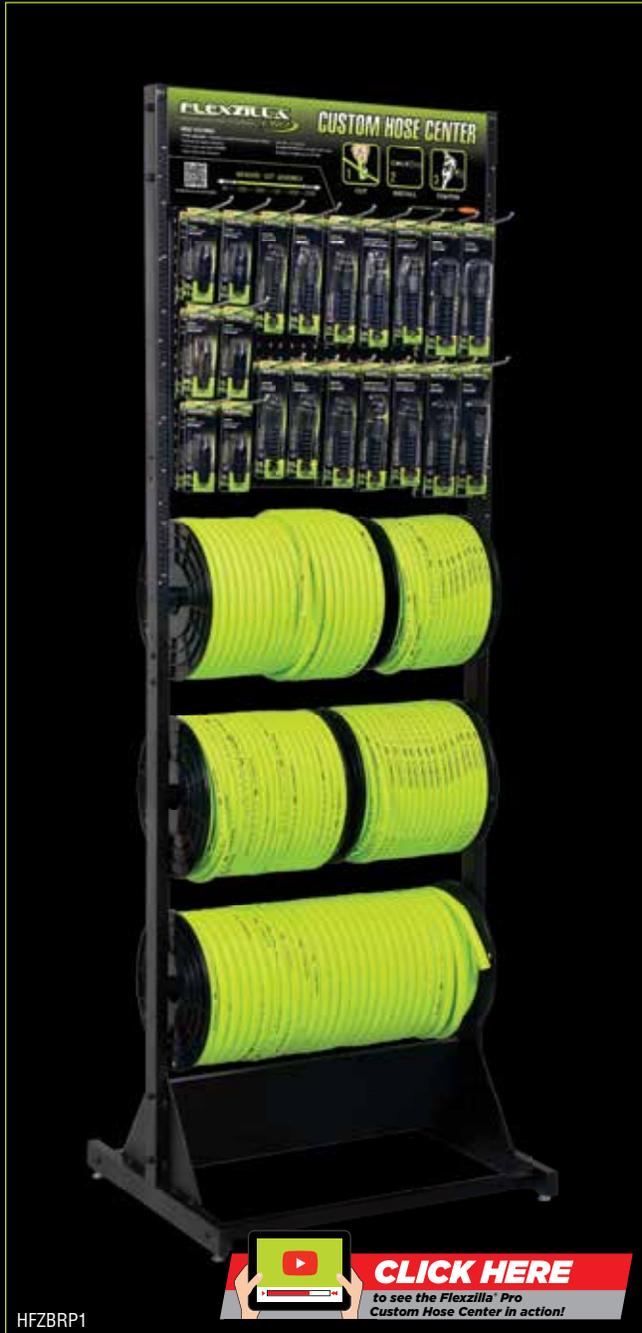

Drinking water safe hose and fittings (Water Hose Only)

Custom Hose Centers (continued)



HFZBRP1 - Flexzilla® Pro Custom Hose Center

Part No.	Description	Rack Quantity
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool, ZillaGreen™	1 ea.
HFZ14250YW	Flexzilla® Pro Air Hose, 1/4 in. x 250 ft. Spool, ZillaGreen™	2 ea.
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool, ZillaGreen™	2 ea.
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	1 ea.
RP900250	Flexzilla® Pro Air Hose Reusable Fitting, 1/4 in.	10 ea.
RP900250BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 1/4 in.	10 ea.
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	10 ea.
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	10 ea.
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.
RP901250	Flexzilla® Pro Air Hose Reusable Splicer, 1/4 in.	10 ea.
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	10 ea.
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.

Parts also sold separately in standard pack quantities

HFZBRP3 - Flexzilla® Pro Custom Hose Center

Part No.	Description	Rack Quantity
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool, ZillaGreen™	1 ea.
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool, ZillaGreen™	4 ea.
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	2 ea.
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	20 ea.
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	20 ea.
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	20 ea.
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.

Parts also sold separately in standard pack quantities



Drinking water safe hose and fittings (Water Hose Only)


Reusable Fittings and Splicers – Air and Water Hose



Flexzilla® Pro Reusable Fittings and Splicers allow you to quickly repair Flexzilla hose on the job site, or create a custom length hose in just three easy steps.

Splicers Include:

- Reusable MNPT anodized aircraft aluminum fitting for Flexzilla and Flexzilla Pro Air Hose

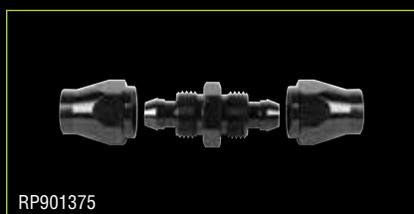

Part No.	Description	Application	Fitting	Barb Size	Retail Packaging
RP900250	Reusable Fitting	Air	1/4 in. MNPT	1/4 in.	●
RP900250BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	●
RP900250S	Reusable Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	●
RP900375	Reusable Fitting	Air	1/4 in. MNPT	3/8 in.	●
RP900375BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	●
RP900375S	Reusable Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	●
RP900500	Reusable Fitting	Air	3/8 in. MNPT	1/2 in.	●
RP900500S	Reusable Ball Swivel Fitting	Air	3/8 in. MNPT	1/2 in.	●
RP901250	Hose Splicer	Air	–	1/4 in.	●
RP901375	Hose Splicer	Air	–	3/8 in.	●
RP901500	Hose Splicer	Air	–	1/2 in.	●
RP900625F	Reusable Fitting	Water	3/4 in. Female GHT	5/8 in.	●
RP900625M	Reusable Fitting	Water	3/4 in. Male GHT	5/8 in.	●

Bulk Air and Water Hose



Flexzilla® Pro bulk hose spools allow you to create custom length hose.



Part No.	Application	Spool Length	Hose I.D.	Hose Fittings	Working Pressure Ratings	Retail Packaging
HFZ14250YW	Air	250 ft.	1/4 in.	Sold separately	300 psi	–
HFZ38250YW	Air	250 ft.	3/8 in.	Sold separately	300 psi	–
HFZ12250YW	Air	250 ft.	1/2 in.	Sold separately	300 psi	–
HFZ34250YW	Air	250 ft.	3/4 in.	Sold separately	200 psi	–
HFZ01250YW	Air	250 ft.	1 in.	Sold separately	200 psi	–
HFZW58250YW	Water	250 ft.	5/8 in.	Sold separately	150 psi	–

Drinking water safe hose and fittings (Water Hose Only)

Air Hose Assemblies



Flexzilla® Pro Field Repairable Air Hose features extreme all-weather flexibility, rugged durability and won't kink under pressure. Its unique Flexible Hybrid Polymer material redefines flexibility. With reusable anodized aircraft aluminum fittings, the Flexzilla Pro Air Hose can be repaired on the job site in a few simple steps.



HFZP3850YW2



FEATURES:

- Field Repairable – Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose



HFZP38100YW2

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZP1425YW2	25 ft.	1/4 in.	1/4 in. MNPT	●
HFZP1450YW2	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZP14100YW2	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZP3825YW2	25 ft.	3/8 in.	1/4 in. MNPT	●
HFZP3835YW2	35 ft.	3/8 in.	1/4 in. MNPT	●
HFZP3850YW2	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZP38100YW2	100 ft.	3/8 in.	1/4 in. MNPT	●

Air Hose Kits – Include Hose, Coupler and Plug



PRO

This convenient hose kit features the revolutionary Flexzilla® Pro Flexible Hybrid Polymer air hose paired with a Red Industrial (Type D) ColorConnex® coupler and plug set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since the thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the job site.

KIT INCLUDES:

- Flexzilla Pro Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- Pre-sealed Threads

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZP1425YW2-D	25 ft.	1/4 in.	1/4 in. MNPT	●
HFZP1450YW2-D	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZP1450YW2-D-10X	50 ft.	1/4 in.	1/4 in. MNPT	●
HFZP14100YW2-D	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZP14100YW2-D-8X	100 ft.	1/4 in.	1/4 in. MNPT	●
HFZP3825YW2-D	25 ft.	3/8 in.	1/4 in. MNPT	●
HFZP3850YW2-D	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZP3850YW2-D-8X	50 ft.	3/8 in.	1/4 in. MNPT	●
HFZP38100YW2-D	100 ft.	3/8 in.	1/4 in. MNPT	●

Part No.'s with -8X or -10X suffix include 8 or 10 hose assemblies respectively in a retail merchandiser display



HFZP1425YW2-D



HFZP1450YW2-D-10X

Custom Length Whip Hoses



PRO



HFZP1406YW2B



HFZP3806YW2B

WHY USE A WHIP HOSE?

- Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- Increases mobility in tight spaces
- Improves air tool ergonomics

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZP1406YW2B	6 ft.	1/4 in.	1/4 in. MNPT Ball Swivel and Reusable Fitting (RP900250)	●
HFZP3806YW2B	6 ft.	3/8 in.	1/4 in. MNPT High Flow Ball Swivel and Reusable Fitting (RP900375)	●

AIR HOSE REELS



LEVELWIND™ TECHNOLOGY

Automatically layers the hose back and forth across the reel.

LATCHING MODE SWITCH

Latch hose every three feet for extended use or switch to free run for immediate, automatic rewinding.

Retractable Air Hose Reels with Levelwind™ Technology



Featuring Levelwind™ – Flexzilla’s unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easily...every time – and includes Flexzilla® air hose and lead-in hose.



L8306FZ

FEATURES:

- **Latching Mode Switch** - Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- **Seven Position Locking Bracket** - These reels can swivel freely on a mounting bracket up to 135° or can be locked into place using the locking brace. Up to seven different locking angles can be utilized (L8300-W)
- **Adjustable Hose Stopper** - Increase or decrease the length of the hose that remains when hose is fully retracted
- **Extra Large Swivel** - A 3/4 in. swivel reduces flow restrictions and allows for maximum flow
- **Free Standing Base** - Portable - Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on the ground
- **Built-In Handle** - For carrying ease
- **Durable Construction** - Made from durable UV stabilized polypropylene
- **Lead-in Hose Included** - 5 ft. x 1/4 in. MNPT
- **Assembled in USA of US and global components**

Retractable Air Hose Reels with Levelwind™ Technology

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8305FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/4 in. – 1 1/2 Male GHT	1/4 in. MNPT	25 lbs.	●
L8306FZ	3/8 in.	75 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/4 in. – 1 1/2 Male GHT	1/4 in. MNPT	32 lbs.	●
L8335FZ	1/2 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/4 in. – 1 1/2 Male GHT	3/8 in. MNPT	29 lbs.	●

Mounting Brackets



L8300-W



L8300-B

L8300-W FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- Mounting options: wall or overhead ceiling

L8300-B FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- Mounting options: high wall or bench

Retractable Air Hose Reels



These economical, retractable air hose reels are ideal for the home shop.



L8250FZ

FEATURES:

- **Auto Retract/Latch Hose Mechanism** - Simplifies every job by keeping excess hose out of the work space
- **Positive Latching Mechanism** - Locks hose automatically in 18 in. intervals
- **Durable Construction** - Made from durable UV stabilized polypropylene
- **Adjustable Hose Stopper** - Increase or decrease the length of the hose that remains when hose is fully retracted
- **Swivel Mounting Bracket** - Pivots in the direction of your work, reel can be mounted to wall or ceiling
- **Lead-in Hose Included** - 3 ft. x 1/4 in. MNPT

HOSE I.D.	WORKING PRESSURE
3/8 IN.	150 PSI

Retractable Air Hose Reels

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Hose Outlet	Weight	Retail Packaging
L8230FZ	3/8 in.	30 ft.	Flexible Hybrid Polymer	150 psi	-40° to 140°	1/4 in. MNPT	12 lbs.	●
L8250FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	150 psi	-40° to 140°	1/4 in. MNPT	18 lbs.	●

Retractable Air Hose Reels – Single Axle Arm Support



These retractable, open face hose reels are ideal for indoor shop, mobile and industrial applications.



L8611FZ

HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI

FEATURES:

- **Multi-Position Guide Arm** - Allows mounting on wall, tank or overhead
- **Durable Heavy-Duty Steel Construction** - Provides strength and stability to the reel and bracket
- **Corrosion-Resistant Powder Coating** - Provides extra measure of protection against the elements
- **Four-Way Direction Rollers** - Allow the hose to be easily pulled from the reel
- **Self-Locking Fasteners** - Stay tight even in mobile installations
- **Narrow Size** - Ideal for easy placement and storage
- **Multi-Position Release Ratchet** - Allows appropriate amount of hose to be extended for each job site
- **Metal Latching Pawl** - Makes an audible clicking sound allowing the latching zone to be locked quickly and easily
- **Fully-Enclosed Spring Motor** - Packed with grease for extended life
- **Lead-in Hose Included** - 5 ft. x 1/4 in. MNPT x 1/4 in. NPSM female swivel

Retractable Air Hose Reels – Single Axle Arm Support

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8603FZ	3/8 in.	25 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. FNPT	1/4 in. MNPT	25 lbs.	-
L8611FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/8 in. FNPT	1/4 in. MNPT	40 lbs.	●

Retractable Air Hose Reels – Dual Axle Arm Support



Featuring dual axle arm support, these retractable open face hose reels can withstand constant vibration making them ideal for mobile installations.



L8711FZ

HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



L8741FZ

HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

FEATURES:

- **Multi-Position Release Ratchet** - Allows appropriate amount of hose to be extended for each job site
- **Durable Heavy-Duty Steel Construction** - Provides strength and stability to the reel
- **Corrosion-Resistant Powder Coating** - Provides extra measure of protection against the elements
- **Four-Way Direction Rollers** - Allow the hose to be easily pulled from the reel
- **Self-Locking Fasteners** - Stay tight even in mobile installations
- **Narrow Size** - Ideal for easy placement and storage
- **Multi-Position Guide Arm** - Allows mounting on wall, truck, tank or overhead
- **Galvanized Dual Support Arms and Bases** - Resist rust and corrosion
- **Dual Axle Arm Support** - Can withstand the constant vibration of mobile installations
- **Lead-in Hose Included** - 5 ft. x 1/4 in. MNPT x 1/4 in. NPSM female swivel

Retractable Air Hose Reels – Dual Axle Arm Support

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8711FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/8 in. FNPT	3/8 in. MNPT	39 lbs.	-
L8741FZ	1/2 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/8 in. FNPT	1/2 in. MNPT	44 lbs.	-

Retractable Air Hose Reels – Single Arm, Open Face



Built with quality and durability in mind, these reels incorporate heavy gauge steel and corrosion-resistant components to withstand the harsh conditions in the workplace.



L8011FZ

HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



L8041FZ

HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

FEATURES:

- **Multi-Position Release Ratchet** - Allows appropriate amount of hose to be extended for each job site
- **Durable Heavy-Duty Steel Construction** - Provides strength and stability to the reel
- **Corrosion-Resistant Powder Coating** - Provides extra measure of protection against the elements
- **Self-Locking Fasteners** - Stay tight even in mobile installations
- **Narrow Size** - Ideal for easy placement and storage
- **Multi-Position Guide Arm** - Allows mounting on wall, tank, overhead, bench, or vehicle
- **Lead-in Hose Included** - 5 ft. x 3/8 in. MNPT swivel x 1/4 in. MNPT (L8011FZ)
- **Lead-in Hose Included** - 5 ft. x 1/2 in. (L8041FZ)

Retractable Air Hose Reels – Single Arm, Open Face

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8011FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	3/8 in. FNPT	3/8 in. MNPT	32 lbs.	-
L8041FZ	1/2 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/2 in. FNPT	1/2 in. MNPT	33 lbs.	-

Manual Air Hose Reels



These manual open face hose reels are ideal for indoor shop, mobile and industrial applications.



FEATURES:

- **Swivel Handle** - Pivots in hand for winding ease
- **Mounting Bracket** - Mount reel to wall, workbench or vehicle
- **Swivel** - Heavy-duty 1/4 in. brass
- **Baked Enamel Finish** - Provides a smooth and durable finish
- **Bend Restrictor** - Prolongs the life of the air hose
- **Lead-in Hose Included** - 3 ft. x 3/8 in.

L8550FZ

HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI

Manual Air Hose Reels

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8550FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. FNPT	1/4 in. MNPT	15 lbs.	-
L8560FZ	3/8 in.	100 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. FNPT	1/4 in. MNPT	22 lbs.	-

Manual Air Hose Reels – Fixed, Heavy Duty



These manual heavy-duty drum reels are compact and ideal for indoor shop and industrial applications.



L8650FZ

HOSE I.D.	WORKING PRESSURE	SUPPORT
3/8 IN.	300 PSI	SINGLE



L8652FZ

HOSE I.D.	WORKING PRESSURE	SUPPORT
3/8 IN.	300 PSI	DUAL

FEATURES:

- **Heavy-Duty Drum** - Heavy-duty steel reinforced drum.
- **Powder Coat Finish** - Provides a smooth and durable finish
- **Brake** - Keeps hose from unwinding unintentionally
- **Inlet Swivel** - Heavy-duty 1/4 in. brass
- **Tapered Side Walls** - Store more hose in less space
- **Swivel Handle** - Pivots in hand for winding ease
- **Mounting Bracket** - Mount reel to wall, workbench, or vehicle
- **Dual Support** - Provides extra stability for the big jobs (L8652FZ only)
- **Bend Restrictor** - Prolongs the life of the air hose
- **Lead-in Hose Included** - 3 ft. x 3/8 in.

Manual Air Hose Reels – Fixed, Heavy Duty

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8650FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. FNPT	1/4 in. MNPT	16 lbs.	-
L8652FZ	3/8 in.	100 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. FNPT	1/4 in. MNPT	30 lbs.	-

Manual Air Hose Reels – Portable



Designed for portability, these reels are useful just about anywhere on the job site. Use an air manifold with the supply hose to service multiple air tools (air manifold is sold separately). The hose layering guide spools hose back onto the reel eliminating tangles; cleanup is faster and easier.



L8651FZ

HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



L8654FZ

HOSE I.D.	WORKING PRESSURE
1/4 IN.	300 PSI

FEATURES:

- **Hose Layering Guide** - Manually operated guide smoothly winds hose without tangles
- **Drum Lock** - Ideal for mobile installations. Prevents air hose from unwinding accidentally
- **Carrying Handle** - For complete portability
- **Support Legs** - Attach support legs for placing reel on ground. Predrilled holes can be used for staking reel to the ground
- **Mounting Bracket** - Reel can be mounted on truck, wall or bench
- **Swivel Handle** - Swivels in hand for winding ease. Folds in for transporting
- **Lead-in Hose Included** - 3 ft. x 3/8 in.

Manual Air Hose Reels – Portable

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Reel Inlet	Hose Outlet	Weight	Retail Packaging
L8651FZ	3/8 in.	50 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	●
L8654FZ	1/4 in.	100 ft.	Flexible Hybrid Polymer	300 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	-

Lead-In Hoses



Flexzilla hose reels come equipped with a lead-in hose as standard equipment. Details regarding the lead-in hose that comes with each reel model are listed below. If for some reason you need to replace your lead-in hose, please refer to the part number that corresponds to your model of reel.



L8305FZLI

Part No.	Lead-in Hose For Part Number(s)	Hose I.D.	Hose Length	Fittings	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Retail Packaging
L8011FZLI	L8011FZ	3/8 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8041FZLI	L8041FZ	1/2 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8250FZLI	L8230FZ, L8250FZ	3/8 in.	3 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	150 psi	-40° to 140°	–
L8305FZLI	L8305FZ, L8306FZ	3/8 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8335FZLI	L8335FZ	1/2 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8611FZLI	L8611FZ, L8711FZ	3/8 in.	5 ft.	3/8 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8651FZLI	L8550FZ, L8560FZ, L8603FZ, L8650FZ, L8651FZ, L8652FZ	3/8 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–
L8654FZLI	L8654FZ	3/8 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	–

360° ROTATION

Ball swivel rotates
360° at a 30° angle.

HIGH FLOW

High flow couplers and plugs
allow twice the amount of
airflow to your tool.

AIR LINE ACCESSORIES

High Flow Couplers and Plugs




Flexzilla® Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. This ensures the best performance your air system can provide. For maximum efficiency, use Flexzilla Pro High Flow.

Don't Starve Your Air Tool!

- Push-To-Connect System
- Maximum Torque
- Maximum RPM
- Ideal for spray guns and impact tools or any high output tool

Flexzilla Pro High Flow Ball Swivel

brings ergonomic ease to any tool attached to it. Save your wrist and improve your ability to get into hard-to-reach places.

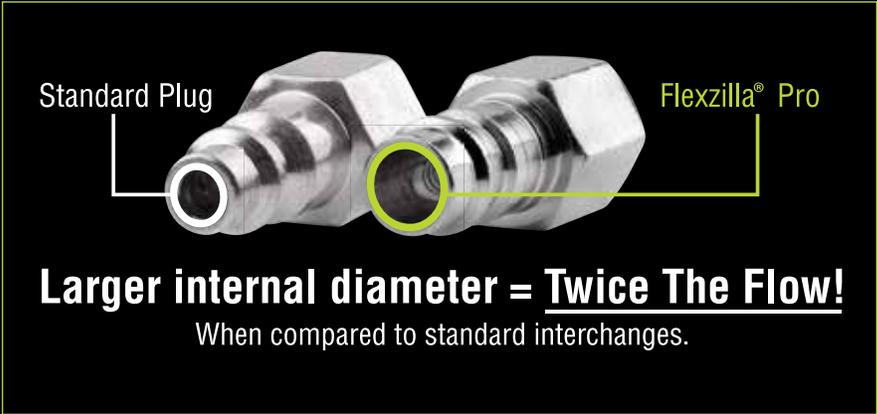

High Flow Couplers and Plugs



PRO

Couplers



A53416FZ-X



A53426FZ-X



A53616FZ-X

Part No.	Type	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
High Flow Couplers							
A53416FZ	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	●
A53416FZ-X	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	-
A53426FZ	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	●
A53426FZ-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	-
A53616FZ	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	●
A53616FZ-X	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	-
A53626FZ	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	●
A53626FZ-X	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	-

*Nickel Plated Steel with Anodized Aluminum Sleeve

-X = Product offered in bulk, individually bagged product

Plugs



PRO



A53430FZ-X



A53440FZ-X



A53440FZBS-X

Part No.	Type	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
High Flow Plugs							
A53430FZ-X	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	-
A53440FZ-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	-
A53630FZ-X	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	-
A53640FZ-X	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	-
A53440FZBS	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	●
A53440FZBS-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	-
High Flow Plugs – 2-Pc.							
A53430FZ-2PK	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	●
A53440FZ-2PK	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	●
A53630FZ-2PK	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	●
A53640FZ-2PK	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	●

-X = Product offered in bulk, individually bagged product

High Flow Coupler and Plug Kits



PRO



A53452FZ



A53657FZ



A53458FZ



A53440FZ-8PK-N



A53000FZK1



A86666FZ

Part No.	Type	Interchange	Connection Size	Body Size	Max. Pressure	Material	Contents	Retail Packaging
3-Pc. Coupler and Plug Kit								
A53452FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) FNPT Plug and (1) MNPT Plug	●
7-Pc. Coupler and Plug Kits								
A53457FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	●
A53657FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	●
14-Pc. Coupler and Plug Kit								
A53458FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(2) FNPT Coupler, (2) MNPT Coupler, (4) FNPT Plug and (6) MNPT Plug	●
8-Pc. Plug Kit								
A53440FZ-8PK-N	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(8) MNPT Plug	●
Accessory Bin Kit								
A53000FZK1	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(10) A53416FZ-X, (10) A53426FZ-X, (10) A53430FZ-X, (20) A53440FZ-X and (10) A53440FZBS-X	-
3-Way Manifold								
A86666FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) 3-Way Flat Hex Manifold, (3) A53626FZ and (1) A53640FZ	●

*Nickel Plated Steel with Anodized Aluminum Sleeve

MODULAR ACCESSORIES SYSTEM

Includes needle tips, chip guards, extensions and OSHA-compliant safety nozzles.

INCREASED AIR FLOW

Variable flow trigger that can be tailored to a high power job or delicate precision work.

BLOW GUNS

THOUGHTFULLY DESIGNED

Ergonomic handle and rubberized grip.

Modular Blow Guns



Introducing Flexzilla™ Blow Guns and accessories. Flexzilla features an ergonomically superior gun body for maximum comfort and control which reduces operator fatigue. A variable flow trigger regulates air volume precisely with maximum flow, equal to or greater than the competition. The exclusive modular accessories system allows the Flexzilla blow guns to be customized for extension length and tips needed for any job. Flexzilla blow gun safety nozzles are labeled to meet or exceed OSHA standards.



Part No.	Description	CFM	dBA	Variable Flow Trigger	Meets OSHA Number	Line psi	Retail Packaging
AG1102FZ	Flexzilla™ X3™ Blow Gun with Quiet-Flo Safety Nozzle	36	87	●	1910.95 (a), 1910.242 (b)	100	●
AG1202FZ	Flexzilla™ X3™ Blow Gun with Xtreme-Flo Safety Nozzle	50	99	●	1910.242 (b)	100	●
AG1402FZ	Flexzilla™ X1™ Blow Gun with Quiet-Flo Safety Nozzle	36	87	–	1910.95 (a), 1910.242 (b)	100	●
AG1502FZ	Flexzilla™ X1™ Blow Gun with Xtreme-Flo Safety Nozzle	43	99	–	1910.242 (b)	100	●

Modular Blow Gun Kits

Flexzilla™ X3™ 6-Pc. Blow Gun Kit

AG1200FZKIT INCLUDES:


- a – Flexzilla X3 Blow Gun - with Variable Flow Trigger
- b – 6 in. Extension
- c – Chip Guard
- d – Tri-Thrust Safety Nozzle
- e – Xtreme-Flo Safety Nozzle
- f – Quiet-Flo Safety Nozzle



Flexzilla™ X1™ 10-Pc. Blow Gun Kit

AG1500FZKIT INCLUDES:




- a – Flexzilla X1 Blow Gun
- b – 6 in. Extensions (x2)
- c – Needle Tips (1 in., 2 in. & 3 in.)
- d – Xtreme-Flo Safety Nozzle
- e – Quiet-Flo Safety Nozzle
- f – Rubber Tip
- g – Tip Adapter

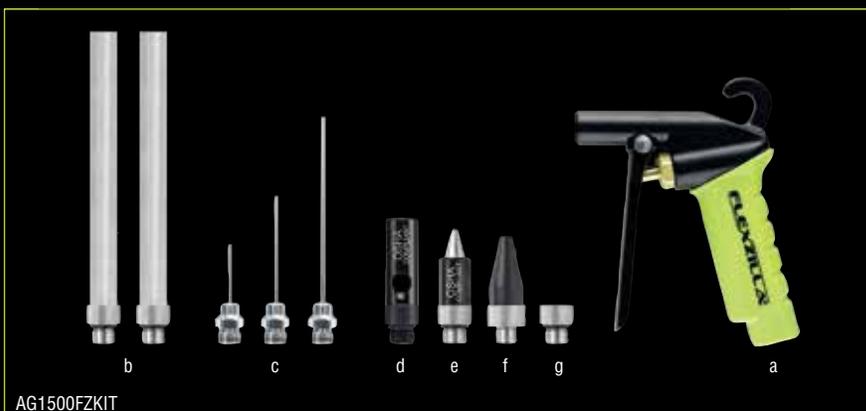

Part No.	Retail Packaging
AG1200FZKIT	●
AG1500FZKIT	●

Modular Blow Guns Accessories System

The exclusive modular accessories system (sold separately) allows the Flexzilla™ blow guns to be customized for extension length and tips needed for any job. Flexzilla safety nozzles and bendable extension are labeled to meet or exceed OSHA standards.

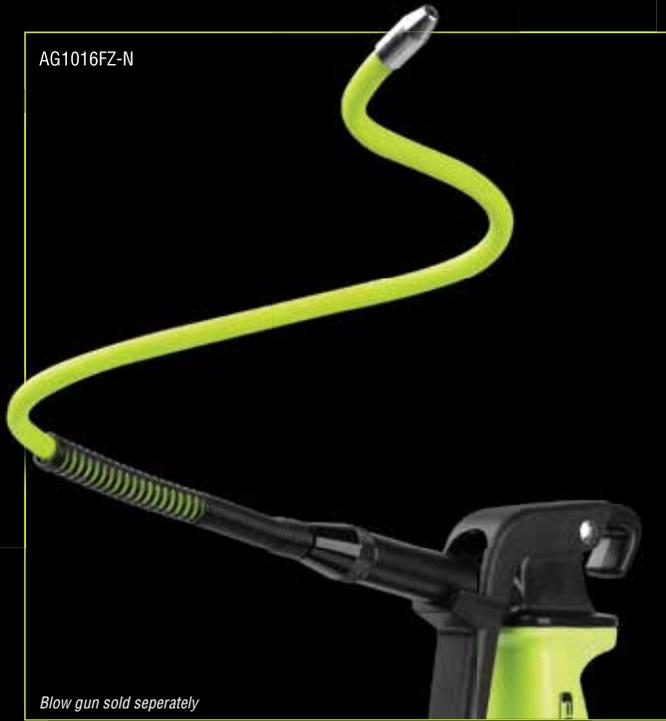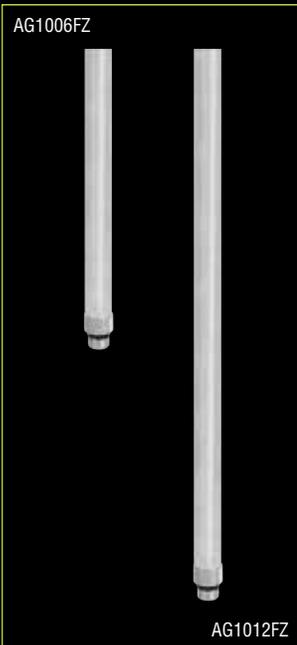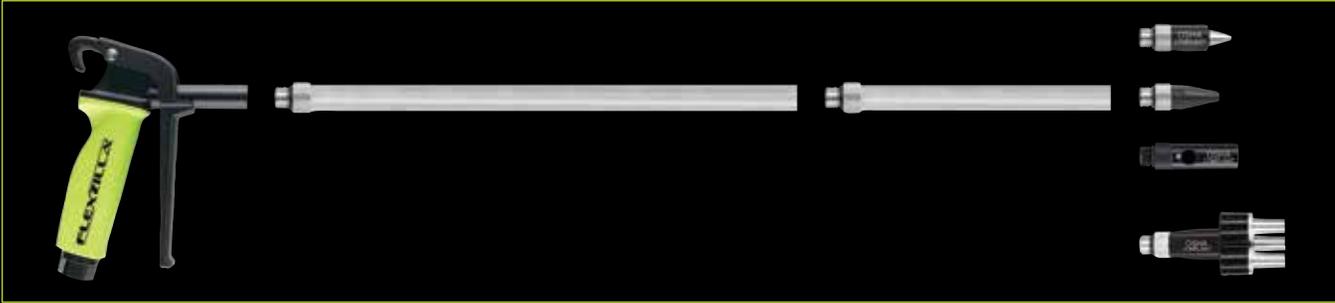

Part No.	Description	Retail Packaging
AG934FZ	Flexzilla™ Rubber Tip	●
AG1090FZ	Flexzilla™ Xtreme-Flo Safety Nozzle	●
AG1091FZ	Flexzilla™ Quiet-Flo Safety Nozzle	●
AG1093FZ	Flexzilla™ Tri-Thrust Safety Nozzle	●
AG1099FZ	Flexzilla™ 5-Pc. Tip Adapter Kit	●
AG1092FZ	Flexzilla™ Chip Guard	●
AG1006FZ	Flexzilla™ 6 in. Extension	●
AG1012FZ	Flexzilla™ 12 in. Extension	●
AG1016FZ-N	Flexzilla™ 16 in. Bendable Extension	●

BREAKAWAY TORQUE

Delivers 800 ft-lbs. of nut-busting breakaway torque.

AIR TOOLS

LIGHTWEIGHT & COMPACT

Making it easy to get into those hard to reach areas.

Mini Impact Wrench Kit



Proving once again you don't have to be big to be powerful. Flexzilla® Pro Air Tools pack high RPM and maximum torque into the lightest, most compact air tools on the market. The mini impact wrench has 800 ft.-lbs. of nut-busting breakaway torque and an extremely lightweight design.



AT8505FZ

TORQUE	DRIVE
800 FT-LBS.	1/2 IN.
HIGH SPEED	AIR CONSUMPTION
9500 RPM	4.8 CFM

Flexzilla Pro Mini Impact Wrench Kit (AT8505FZ)

FEATURES:

- 800 ft.-lbs. of nut-busting breakaway torque
- Compact design – Ideal for tight spaces, 4.4 in.
- Torque selector – Maximum torque, 550 ft.-lbs.
- Extremely lightweight – Composite design, 2.5 lbs.
- Patented Forward/Reverse toggle switch
- Handle exhaust – Directs air away from user
- 1/4 in. NPT air inlet with built-in swivel
- Ergonomic grip
- High speed, 9500 RPM
- Air Consumption: 4.8 CFM
- Drive: 1/2 in.

KIT INCLUDES:

- Flexzilla Pro Mini Impact Wrench
- Flexzilla Pro Air Hose with Reusable Fittings, 3/8 in. x 50 ft.
- Flexzilla Pro High Flow Couplers and Plugs
 - (1) 1/4 in. FNPT Coupler
 - (1) 1/4 in. MNPT Coupler
 - (2) 1/4 in. FNPT Plugs
 - (3) 1/4 in. MNPT Plugs
 - (1) 1/4 in. MNPT Ball Swivel Plug

Part No.	Retail Packaging
AT8505FZ	●

Mini Impact Wrench



Flexzilla Pro Mini Impact Wrench (AT1475FZ)

Part No.	Retail Packaging
AT1475FZ	●

INCLUDES:

- Flexzilla Pro Mini Impact Wrench
- Flexzilla Pro High Flow 1/4 in. MNPT Ball Swivel Plug



AT1475FZ

Reactionless Mini Air Ratchet Kit



AT8535FZ

TORQUE	DRIVE
45 FT-LBS.	3/8 IN.
HIGH SPEED	WEIGHT
700 RPM	1.5 LBS.

Get in tight spots and get the job done with Flexzilla® Pro Reactionless Mini Air Ratchet. No more busted knuckles. No pinched fingers. The reactionless clutch prevents kickback when you bottom out. The compact and lightweight design is perfect for small workspaces like under automotive dashboards. Plus, its super high-speed lets you remove or tighten bolts in a flash.

Flexzilla Pro Reactionless Mini Air Ratchet Kit (AT8535FZ)

FEATURES:

- Reactionless clutch
- Built-in air regulator
- Built-in swivel
- High speed, 700 RPM
- Torque: 45 ft-lbs.
- Rear exhaust
- Compact and lightweight
- Length: 7.5 in.
- Weight: 1.5 lbs.
- Drive: 3/8 in.

KIT INCLUDES:

- Flexzilla Pro Reactionless Mini Air Ratchet
- Flexzilla Pro Custom Length Whip Hose with High Flow Ball Swivel and Reusable Fitting, 3/8 in. x 6 ft.
- Flexzilla Pro High Flow Couplers and Plugs
 - (1) 1/4 in. FNPT Coupler
 - (1) 1/4 in. MNPT Coupler
 - (2) 1/4 in. FNPT Plugs

Part No.	Retail Packaging
AT8535FZ	●

Reciprocating Mini Air Saw Kit



AT8565FZ

HIGH SPEED	AIR CONSUMPTION	WEIGHT
9500 SPM	3.5 CFM	0.9 LBS.

The Flexzilla® Pro Reciprocating Mini Air Saw is perfect for working in tight spaces to get the job done. The lightweight, compact design and low vibration reduces operator fatigue during extended use. Plus, its high-speed, strokes per minute, allows you to cut through the toughest materials with ease and comfort.

Flexzilla Pro Reciprocating Mini Air Saw Kit (AT8565FZ)

FEATURES:

- High speed (Blade speed), 9500 SPM
- Air consumption: 3.5 CFM
- Low vibration
- Rear exhaust
- Compact and lightweight
- Length: 6.3 in.
- Weight: 0.9 lbs.

KIT INCLUDES:

- Flexzilla Pro Reciprocating Mini Air Saw
- Flexzilla Pro Custom Length Whip Hose with High Flow Ball Swivel and Reusable Fitting, 3/8 in. x 6 ft.
- Flexzilla Pro High Flow Couplers and Plugs
 - (1) 1/4 in. FNPT Coupler
 - (1) 1/4 in. MNPT Coupler
 - (2) 1/4 in. FNPT Plugs
- Blades
 - (1) Coarse (24 tooth)
 - (1) Fine (32 tooth)
- Allen Wrench

Part No.	Retail Packaging
AT8565FZ	●

Mini Impact Wrench Kit



This convenient kit comes complete with a Flexzilla™ Mini Impact Wrench, ColorConnex® X-Flo™ Couplers and Plugs, and a Flexzilla® Air Hose. The Mini Impact Wrench has 700 ft-lbs. of nut-busting breakaway torque and an extremely lightweight design.

Flexzilla Mini Impact Wrench Kit (AT8500FZ)

FEATURES:

- 700 ft-lbs. of nut-busting breakaway torque
- Compact design – Ideal for tight spaces, 4.4 in.
- Torque selector – Maximum torque, 500 ft-lbs.
- Extremely lightweight – Composite design, 2.5 lbs.
- Patented Forward/Reverse toggle switch
- Handle exhaust – Directs air away from user
- 1/4 in. NPT air inlet with built-in swivel
- Ergonomic grip
- High speed, 9500 RPM
- Air Consumption: 4.8 CFM
- Drive: 1/2 in.

KIT INCLUDES:

- Flexzilla Mini Impact Wrench
- Flexzilla Air Hose, 3/8 in. x 25 ft.
- ColorConnex® X-Flo™ Couplers and Plugs
 - (1) X-Flo Coupler, 1/4 in. FNPT
 - (1) X-Flo Coupler, 1/4 in. MNPT
 - (1) Plug, 1/4 in. FNPT
 - (2) Plugs, 1/4 in. MNPT

Part No.	Retail Packaging
AT8500FZ	●



TORQUE	DRIVE
700 FT-LBS.	1/2 IN.
HIGH SPEED	AIR CONSUMPTION
9500 RPM	4.8 CFM

Reactionless Mini Air Ratchet Kit



Get in tight spots and get the job done with Flexzilla® Reactionless Mini Air Ratchet. No more busted knuckles. No pinched fingers. The reactionless clutch prevents kickback when you bottom out. The compact and lightweight design is perfect for small workspaces like under automotive dashboards. Plus, its super high-speed lets you remove or tighten bolts in a flash. This convenient kit includes Flexzilla Reactionless Mini Air Ratchet, ColorConnex® X-Flo™ Couplers and Plugs, and a Flexzilla® Whip Hose.

Flexzilla Reactionless Mini Air Ratchet Kit (AT8530FZ)

FEATURES:

- Reactionless clutch
- High speed, 650 RPM
- Torque: 40 ft-lbs.
- Rear exhaust
- Compact and lightweight
- Length: 6.5 in.
- Weight: 1.3 lbs.
- Drive: 3/8 in.

KIT INCLUDES:

- Flexzilla Reactionless Mini Air Ratchet
- Flexzilla Whip Hose, 3/8 in x 2 ft.
- ColorConnex® X-Flo™ Couplers and Plugs
 - (1) X-Flo Coupler, 1/4 in. FNPT
 - (1) X-Flo Coupler, 1/4 in. MNPT
 - (1) Plug, 1/4 in. FNPT
 - (1) Plug, 1/4 in. MNPT

Part No.	Retail Packaging
AT8530FZ	●



TORQUE	DRIVE
40 FT-LBS.	3/8 IN.
HIGH SPEED	WEIGHT
650 RPM	1.3 LBS.

TIRE MAINTENANCE

INFLATE AND MONITOR

Inflate and check tire pressure simultaneously at a safe distance.

Tire Inflators



Tire inflators deliver accurate pressure to car, truck, bike, and off-road tires.



AL2000FZ

AL2000FZ FEATURES:

- Range: 20 to 170 psi
- Straight-on chuck with 12 in. air hose
- Heavy-duty gauge
- Indicator bar is calibrated in 2 psi increments from 20 to 100 psi



AL2025FZ-1

AL2025FZ-1 FEATURES:

- Range: 10 to 170 psi
- Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 ft. air hose extension



AL2025FZ-2

AL2025FZ-2 FEATURES:

- Range: 10 to 170 psi
- Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 and 15 ft. air hose extensions
- OSHA Compliant - 15 ft. hose only



Part No.	Type	Hose Length	Inlet	Hose I.D.	Body Material	Retail Packaging
AL2000FZ	Tire Inflator	1 ft.	1/4 in. FNPT	1/4 in.	Die-cast Zinc	●
AL2025FZ-1	Inflator Kit	3 ft.	1/4 in. FNPT	1/4 in.	Nylon/Brass	●
AL2025FZ-2	Combo Inflator Kit	3 ft. & 15 ft.	1/4 in. FNPT	1/4 in.	Nylon/Brass	●
HGH2-FZ	Truck Tire Inflator Kit	50 ft.	1/4 in. MNPT	3/8 in.	-	●

Truck Tire Inflator Kit



The Flexzilla truck tire inflator kit uses a truck's on-board air supply to inflate tires in remote situations.

HGH2-FZ INCLUDES:

- 3/8 in. x 50 ft. air hose
- Glad-hand attachment
- 30° Dual air chuck



HGH2-FZ

EXCLUSIVE SWIVELGRIP™

SwivelGrip™ action allows the water hose to rotate freely inside the grip. It eliminates twists in the hose as you uncoil it and prevents kinks in the hose as you move across the yard.

(SwivelGrip™ Patent Pending)

WATER HOSES

EXTREME ALL-WEATHER FLEXIBILITY

Lightweight and easy to handle, Flexzilla hose lays flat and has no memory, even in extreme weather conditions.

FLEXIBLE HYBRID POLYMER

Flexzilla® hoses have a durable, abrasion-resistant outer cover.

SwivelGrip™ Garden and Lead-in Hose Assemblies



Flexzilla® makes it easier to work around your home and lawn. SwivelGrip™ action eliminates twists that occur when uncoiling a hose. Conventional garden hose can trap coils that tighten into kinks as you move across the yard. SwivelGrip releases these trapped coils because the hose rotates freely inside the grip. The large, comfortable gripping surface on both ends of the hose makes connections much easier to turn and tighten. Plus, with our superior O-ring you get a long-term, leak-free connection at the spigot. SwivelGrip hoses are also drinking water safe.



HFZG550YWS

FEATURES:

- Male and female SwivelGrip™ Connections
- Extreme all-weather flexibility
- Won't kink under pressure
- Lightweight, coils easily
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Leak-free O-rings
- Max. working pressure at 70°F: 150 psi
- **Drinking water safe**



HFZG503YWS

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZG503YWS	3 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG510YWS	10 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG510YWS-6X	10 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG525YWS	25 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG550YWS	50 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG575YWS	75 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG5100YWS	100 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZGSQTR1*	50 ft.	5/8 in.	3/4 in. - 11½ GHT	●

*HFZGSQTR1 includes 40 each HFZG550YWS

Part No. with -6X suffix includes 6 hose assemblies in a retail merchandiser display



HFZG550YWS

Exclusive SwivelGrip™ Action

■ Hose spins freely to release coils!

Hose turns inside grip

Makes connections easy

Connects Easily

SwivelGrip™ Patent Pending

Attachments

Spigot

SwivelGrip™ Garden Hose Merchandiser and Quarter Pallets



HFZG510YWS-6X

Flexzilla Garden Hose Merchandiser



HFZGSQTR1

Flexzilla Garden Hose Quarter Pallet



HFZCSQTR1

Colors™ Garden Hose Quarter Pallet

Colors™ SwivelGrip™ Garden Hose Assemblies



From the makers of Flexzilla® hoses, tools and equipment, Colors™ Garden Hose with exclusive SwivelGrip™ action allows the hose to uncoil easily and provides tangle free yardwork. Easily connect the hose to spigot and attachments. It features the same Flexible Hybrid Polymer material as our renowned ZillaGreen™ hoses, but comes in earthy colors that blend with a variety of landscapes. (SwivelGrip™ Patent Pending)



HFZC550BRS

SWIVELGRIP™ FEATURES:

- Male and female SwivelGrip Connections
 - Exclusive SwivelGrip Action
 - Hose turns freely inside grip
 - Uncoils easily
 - Easily connects to attachments
 - Tangle free yardwork



HFZC550BRS



HFZC550TCS

Part No.	Color	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZC550BRS	Brown Mulch	50 ft.	5/8 in.	3/4 in. - 1 1/2 GHT	●
HFZC550TCS	Red Clay	50 ft.	5/8 in.	3/4 in. - 1 1/2 GHT	●
HFZCSQTR1*	Brown Mulch /Red Clay	50 ft.	5/8 in.	3/4 in. - 1 1/2 GHT	●

*HFZCSQTR1 includes 20 each HFZC550BRS and HFZC550TCS



Garden and Lead-in Hose Assemblies



Flexzilla® Garden Hose was engineered with a lightweight Flexible Hybrid Polymer to lie flat and eliminate kinking under pressure. It redefines flexibility, making it easy to maneuver around trees, bushes or other obstacles. Zero memory means your sprinkler stays put without twisting. And Flexzilla Garden Hose doesn't fight you when you coil it. Plus, with our superior O-ring you get a long-term, leak-free connection at the spigot. The Flexible Hybrid Polymer inner tube material is drinking water safe.



HFZG550YW



HFZG503YW



HFZG510YW



HFZG550YW

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZG503YW	3 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG505YW	5 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG510YW	10 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG525YW	25 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG550YW	50 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG575YW	75 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG5100YW	100 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZG650YW	50 ft.	3/4 in.	3/4 in. - 11½ GHT	●
HFZG675YW	75 ft.	3/4 in.	3/4 in. - 11½ GHT	●
HFZG6100YW	100 ft.	3/4 in.	3/4 in. - 11½ GHT	●

Garden Hose Kit with Quick Connect Attachments

The Flexzilla® Garden Hose Kit with Quick Connect Attachments features Flexible Hybrid Polymer material with extreme all-weather flexibility that allows hose to lie flat and won't kink under pressure. It's lightweight and coils easily. The convenient Flexzilla Garden Hose Kit comes with hose, twist action nozzle, quick connect stop-flow coupler, spigot adapter, hose adapters and hose hanger to make gardening a snap.



Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZG12050QN	50 ft.	1/2 in.	3/4 in. - 1 1/2 GHT	●

HOSE FEATURES:

- Extreme all-weather flexibility
- Won't kink under pressure
- Lightweight, coils easily
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Quick connect couplers
- Max. working pressure at 70°F: 150 psi

SPRAY NOZZLE FEATURES:

- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)

GARDEN HOSE KIT INCLUDES:

- a – Flexzilla Garden Hose with Quick Connect Couplers
- b – Hose hanger
- c – Nozzle
- d – Adapter for spigot
- e – (2) Garden hose attachment adapters



3-Piece Nozzle Kit with Quick Connections

KIT INCLUDES:

- Quick Connect Spray Nozzle
 - Soft mist for flowers and plants
 - Jet spray for long distances (up to 20 ft.)
- Stop-Flow Coupler – Prevents user from being sprayed when connecting and disconnecting
- Quick Connect Attachment Adapter – Easily connect to sprinkler or other attachments

Part No.	Retail Packaging
HFZGAK01	–
HFZGAK02	●



Flexzilla® Pro Water Hose



FIELD REPAIRABLE



CUSTOM LENGTHS

Flexzilla® Pro Water Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application. The field repair and custom length hose process takes

3 EASY STEPS



CUT – Remove damaged portion of hose or measure and cut desired length at 90° angle.



INSTALL – Slide spiral fitting and nut onto hose. Push hose onto fitting until hose reaches threads.



TIGHTEN – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.


Custom Water Hose Centers



The Flexzilla® Pro Custom Water Hose Centers allow you to provide your customers with custom length hose. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site. The Custom Water Hose Centers also include Flexzilla SwivelGrip™ Garden lead-in hose assemblies.



HFZWHC1

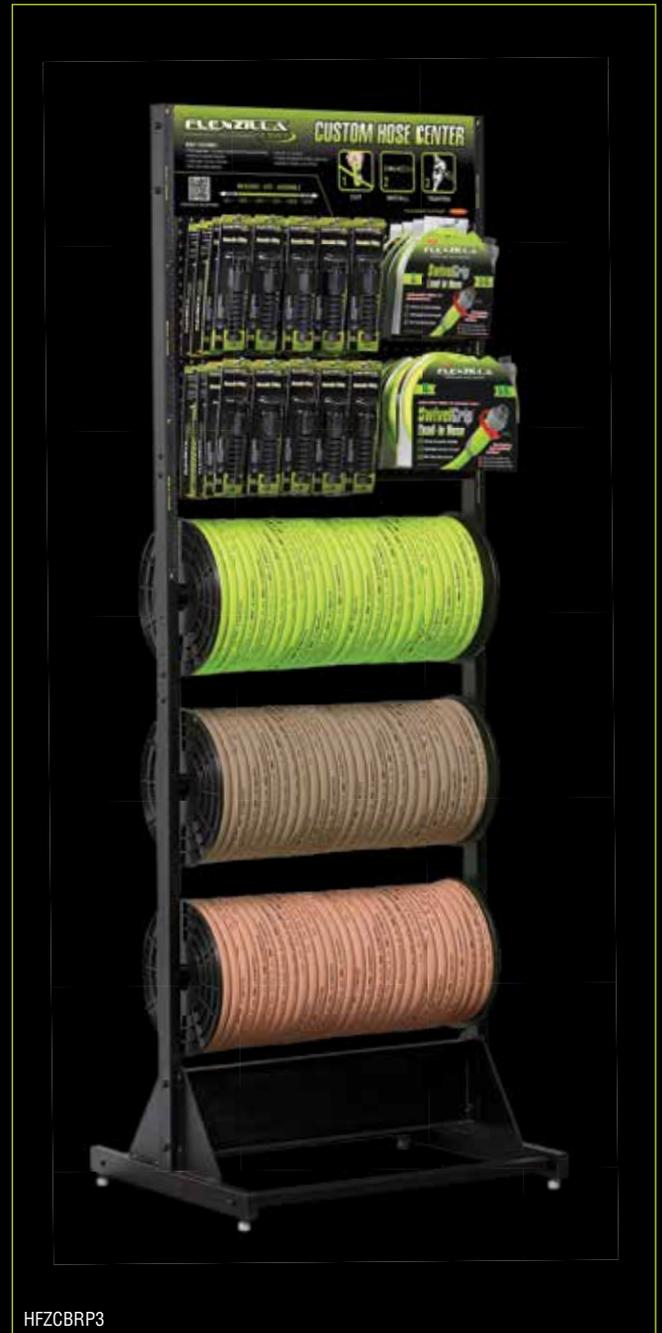

HFZCBRP3

SwivelGrip™ Garden Lead-In hoses are not field repairable

Custom Water Hose Centers (continued)




Part No.	Description	Rack Quantity
HFZWHC1 - Flexzilla® Pro Custom Water Hose Center		
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	750 ft.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	30 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	30 ea.
HFZG503YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 3 ft.	10 ea.
HFZG510YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 10 ft.	20 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.
HFZCBRP3 - Flexzilla® Pro Colors Custom Water Hose Center		
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	250 ft.
HFZC58250BRS	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, Brown Mulch	250 ft.
HFZC58250TCS	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, Red Clay,	250 ft.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	30 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	30 ea.
HFZG503YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 3 ft.	10 ea.
HFZG510YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 10 ft.	20 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.

Parts also sold separately in standard pack quantities



HFZW58250YW

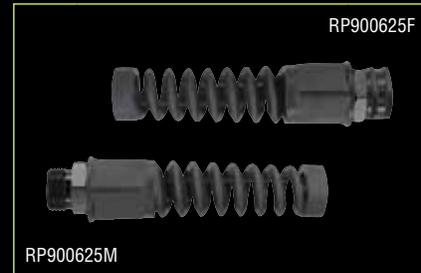

RP900625F

RP900625M

Water Hose Assemblies



FEATURES:

- Field Repairable – Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility
- Lightweight, coils easily
- Won't kink under pressure
- Lays flat - no memory
- Durable and abrasion-resistant outer cover
- Leak-free O-rings
- Max. working pressure at 70°F: 150 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose
- Drinking water safe



Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZWP550	50 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZWP575	75 ft.	5/8 in.	3/4 in. - 11½ GHT	●
HFZWP5100	100 ft.	5/8 in.	3/4 in. - 11½ GHT	●



HFZWP550



Water Hose Nozzles



FEATURES:

- Precision flow port – Inline connection allows water to flow directly, not up and through the handle – increases water flow, pressure and power by approximately 30%
- Multiple spray patterns – Select from jet, fan, power or low flow spray – perfect for any job in the shop, garage or home
- Ergonomic handle provides an easy grip for less user fatigue
- Machined aircraft aluminum barrel and Santoprene™ rubber handle and head
- Durable, non-marring outer cover that protects painted surfaces
- Leak-free O-ring - outlasts the competition
- Works with 1/2, 5/8 and 3/4 in. water hose

Retractable Water Hose Reel with Levelwind™ Technology



Featuring Levelwind™ – Flexzilla’s unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easily...every time – and includes Flexzilla® water hose and lead-in hose.



L8340FZ

FEATURES:

- **Latching Mode Switch** – Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- **Seven Position Locking Bracket** – These reels can swivel freely on the mounting bracket up to 135° or can be locked into place using the locking brace. Up to seven different locking angles can be utilized (L8300-W)
- **Adjustable Hose Stopper** – Increase or decrease the length of the hose that remains when hose is fully retracted
- **Extra Large Swivel** – A 3/4 in. swivel reduces flow restriction and allows maximum flow
- **Free Standing Base** – Portable - Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on ground
- **Built-In Handle** – For carrying ease
- **Durable Construction** – Made from durable UV stabilized polypropylene
- **Lead-in Hose Included** – 10 ft. x 3/4 in. x 11½ GHT (L8340FZLI)
- **Assembled in USA of US and global components**

Retractable Water Hose Reels with Levelwind™ Technology

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Reel Inlet	Weight	Retail Packaging
L8340FZ	1/2 in.	70 ft.	Flexible Hybrid Polymer	150 psi	3/4 in. – 11½ Male GHT	31 lbs.	●

Mounting Brackets



L8300-W



L8300-B

L8300-W FEATURES:

- Includes a seven position locking brace
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- Mounting options: wall or overhead ceiling

L8300-B FEATURES:

- Includes a seven position locking brace
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- Mounting options: high wall or bench

Pressure Washer Hose Assemblies

Flexzilla® offers a revolutionary pressure washer hose that redefines flexibility, even under pressure. Unlike other pressure washer hose, Flexzilla stays flexible when pressurized during use and offers minimal memory when depressurized. It also lays flat and won't work against you before, during or after use.



HFZPW3425M

FEATURES:

- Extreme flexibility under pressure, from subzero to 140°F
- Made of Flexible Hybrid Polymer material
- Integral non-kink bend restrictor
- Max. working pressure at 70°F: 3,100 psi
- Cold water use only
- **Made in USA**



HFZPW3425M

Part No.	Hose Length	Hose I.D.	Fittings	Retail Packaging
HFZPW3425M	25 ft.	1/4 in.	M22	●
HFZPW3425M-5X	25 ft.	1/4 in.	M22	●
HFZPW3450M	50 ft.	1/4 in.	M22	●
HFZPW3450M-3X	50 ft.	1/4 in.	M22	●
HFZPW3525M	25 ft.	5/16 in.	M22	●
HFZPW3525M-5X	25 ft.	5/16 in.	M22	●
HFZPW3550M	50 ft.	5/16 in.	M22	●
HFZPW3550M-3X	50 ft.	5/16 in.	M22	●

Part No.'s with -3X suffix include 3 hose assemblies in a retail merchandiser display

Part No.'s with -5X suffix include 5 hose assemblies in a retail merchandiser display



HFZPW3550M-3X



HFZPW3425M-5X

Quick Connect Couplers and Plugs



FEATURES:

- Easily connect and disconnect without tools

Part No.	Description	Connection Size	Material	Retail Packaging
PW3500	Quick Connect Coupler	1/4 in. FNPT	Brass	●
PW3510	Quick Connect Plug	1/4 in. FNPT	Plated Steel	●
PW3511	Quick Connect Plug	1/4 in. MNPT	Plated Steel	●
PW3520	Quick Connect Coupler	3/8 in. FNPT	Brass	●
PW3530	Quick Connect Plug	3/8 in. FNPT	Plated Steel	●
PW3531	Quick Connect Plug	3/8 in. MNPT	Plated Steel	●
PW3560	Quick Connect Coupler - Economy	1/4 in. FNPT	Brass	●
PW3570	Quick Connect Plug - Economy	1/4 in. FNPT	Plated Steel	●
PW3571	Quick Connect Plug - Economy	1/4 in. MNPT	Plated Steel	●
PW3580	Quick Connect Coupler - Economy	3/8 in. FNPT	Brass	●
PW3590	Quick Connect Plug - Economy	3/8 in. FNPT	Plated Steel	●
PW3591	Quick Connect Plug - Economy	3/8 in. MNPT	Plated Steel	●

Screw Couplers



FEATURES:

- Easily connect and disconnect without tools

SPECIFICATIONS:

- O-Ring: EPDM
- Outlet: M22
- Yoke/ID: M14
- Temp. Rating: 300°F
- Pressure Rating: 5,800 psi

Part No.	Description	Connection Size	Material	Retail Packaging
PW3021	Screw Coupling	M22 x 1/4 in. FNPT	Brass	●
PW3023	Screw Coupling	M22 x 3/8 in. FNPT	Brass	●

Swivel Coupling and Nipples

FEATURES:

- Easily connect and disconnect without tools
- Connects 3/8 in. pressure washer equipment using screw nipples
- Converts M22 metric threads to standard

SPECIFICATIONS:

- O-Ring: EPDM
- Outlet: M22
- Yoke/ID: M14
- Temp. Rating: 300°F
- Pressure Rating: 5,800 psi



Part No.	Description	Connection Size	Material	Retail Packaging
PW3002	Nipple	M22 x 1/4 in. FNPT	Brass	●
PW3003	Nipple	M22 x 1/4 in. MNPT	Brass	●
PW3004	Nipple	M22 x 3/8 in. FNPT	Brass	●
PW3005	Nipple	M22 x 3/8 in. MNPT	Brass	●
PW3032	Swivel Coupling	M22 x 1/4 in. MNPT	Brass	●

Spray Guns and Handles



PW2000



PW2305



PW1020

FEATURES:

- Forged brass housing for maximum strength
- Stainless steel spring, needle, ball and seat for chemical-resistance
- Special heat and chemical-resistant seals for optimum performance

SPECIFICATIONS:

- Flow Rate: 10.4 GPM
- Inlet: 3/8 in. FNPT
- Outlet: 1/4 in. FNPT
- Temp. Rating: 300°F
- Pressure Rating: 5,000 psi

Part No.	Description	Flow Rate	Inlet Size	Outlet Size	Pressure Rating	Temp. Rating	Retail Packaging
PW2000	Spray Gun	10.4 GPM	3/8 in. FNPT	1/4 in. FNPT	5,000 psi	300°F	●
PW2305	Spray Gun - Easy Pull	10.4 GPM	3/8 in. FNPT	1/4 in. FNPT	5,000 psi	300°F	●
PW1020	Lance Handle		N/A	N/A	N/A	N/A	●

Nozzle Kit

FEATURES:

- Varying degrees of spray for a variety of applications
- Color coded to quickly identify degree of spray
- Easily connect and disconnect without tools



PW4000

SPECIFICATIONS:


- Pressure Rating: 4,000 psi
- Red 0° - Blasting Nozzle
- Yellow 15° - Chiseling Nozzle
- Green 25° - Flushing Nozzle
- White 40° - Wash Nozzle
- Black 65° - Soap Nozzle

Part No.	Description	Retail Packaging
PW4000	Quick Connect Nozzle Kit, Multiple Degrees, 1/4", 5-Piece	●

Lances

FEATURES:

- Can be used for hot or cold water applications
- Nickel chrome plated steel (prevents rust)
- Suitable for use with corrosive chemicals
- Rolled threads provide a more consistent seal and are four times stronger than cut threads



PW1013

SPECIFICATIONS:

- Inlet: 1/4 in. MNPT
- Outlet: 1/4 in. MNPT
- Temp. Rating: 300°F
- Pressure Rating: 5,800 psi

Part No.	Description	Retail Packaging
PW1013	Lance 36 in.	●
PW1015	Lance 48 in.	●

LIGHTED PLUG

Light up any work site with the lighted green plug, ensuring you can always find the power source.

GLOW STRIPE

Features a glow-in-the-dark stripe that runs the length of the cord.

EXTENSION CORDS


Extension Cords

PRO

The Flexzilla® Pro extension cord is engineered to stay flexible in cold weather. It features a glow-in-the-dark stripe offering the operator the convenience they need when locating the cord in low light situations. Flexzilla Pro extension cords are ideal for indoor/outdoor industrial grade applications.

FEATURES:

- Extreme all-weather flexibility (-58° to 167°F)
- Resists kinks, coils easily
- Lighted plug
- Glow-in-the-dark stripe
- Indoor and outdoor use
- Grounded plug
- UL listed

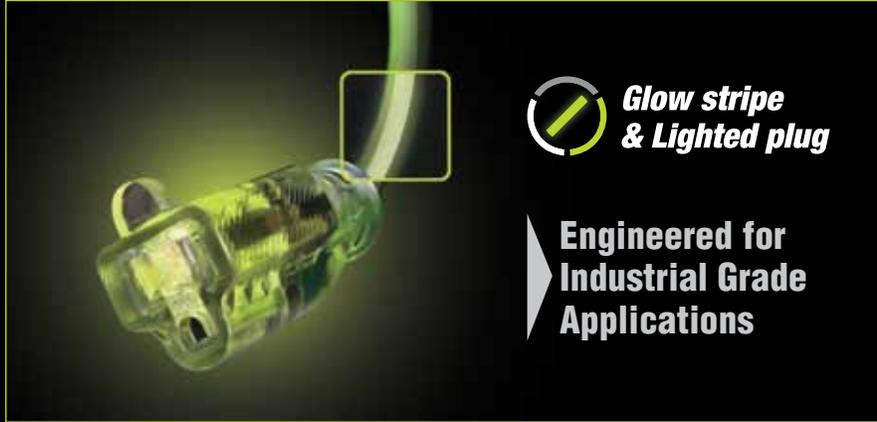

Part No.	Cord Length	Gauge	Retail Packaging
FZ512930	50 ft.	10 ga.	●
FZ512935	100 ft.	10 ga.	●
FZ512825	25 ft.	12 ga.	●
FZ512830	50 ft.	12 ga.	●
FZ512835	100 ft.	12 ga.	●
FZ512725	25 ft.	14 ga.	●
FZ512730	50 ft.	14 ga.	●
FZ512735	100 ft.	14 ga.	●



Flexzilla® Pro Extension Cords are manufactured by Prime Wire & Cable, Inc. in partnership with Legacy Manufacturing Company, and are distributed by both Prime Wire & Cable and Legacy Mfg. Co.

Retractable Extension Cord Reel

ZillaReel™ Retractable Extension Cord Reel comes pre-loaded with 50 feet of heavy gauge oil and cold-weather resistant cord and will store your extension cord until needed, eliminating tangles. The ZillaReel case is made of impact-resistant polypropylene, making it light and compact. This retractable cord reel is ideal for general, commercial and industrial use.

FEATURES:

- Lighted triple tap outlet for plenty of capacity
- Circuit breaker with reset button prevents breaker from tripping and blown fuses. Reset circuit breaker on side of reel
- Oil-Resistant 14/3 AWG SJTOW cord flexible in low temperatures and resists the effects of oil, water and sunlight
- Cord locks out in 3 ft. increments
- Adjustable cord stopper ensures outlet is always within reach
- Grounded plug includes 4.5 ft. lead-in cord
- Swivel mounting bracket rotates 180° and can be wall or ceiling mounted
- Recommended for dry, indoor locations



Grounded Plug



ETL Listed



E8140503

GAUGE	CORD LENGTH
14 GA.	50 FT.

Part No.	Cord Length	Gauge	AMP	Retail Packaging
E8140503	50 ft.	14 ga.	13A	●

GREASING EQUIPMENT

FLEXZILLA® GREASE HOSE

Stays flexible, even in subzero temperatures.

LED LIGHTING

Keep your work space well-lit long after sundown.

RAPID RELOAD™ TECHNOLOGY

Push button technology that allows for quick cartridge loading and includes a threadless grease barrel.

(Rapid Reload™ Push Button Technology Patent Pending)

20V Cordless Grease Gun Kit

There is a new creature dominating automotive shops, farms and worksites across the country. Introducing the Flexzilla® 20V Cordless Grease Gun Kit. It proves what can be accomplished when you combine over 30 years of grease gun experience from Legacy Manufacturing with the extreme performance of Flexzilla.



GREASE GUN FEATURES:

- Rapid Reload™ Push Button Technology
 - For fast cartridge loading and unloading
 - Includes lightweight threadless grease barrel
- Flexzilla Grease Hose - 42 in.
 - Extreme cold-weather flexibility (subzero to 140°F)
 - Non-kink bend restrictor
- LED Light - Illuminate workspace
- Ergonomic Grip
- Non-slip Pads - Stabilize gun when standing up and laying on its side. Ideal for tight spaces
- Hose Dock - Secure and manage hose
- Lightweight Aluminum Barrel with Firm Grip Knurling - For better grip and durability
- Positive T-Grip Follower Handle
- Pressure Relief Valve
- 4-Jaw Coupler – Provides quality connection, disconnection, and sealing to zerk
- Holds 14 oz. Grease Cartridge (Cartridge not included)
- Delivers up to 7,000 psi

RAPID RELOAD™ PUSH BUTTON TECHNOLOGY

- For fast cartridge loading
- (Patent Pending)



1 Press to release barrel



2 Slide barrel out to reload



L1388LFZ KIT INCLUDES:

- Flexzilla 20V Cordless Grease Gun
- Flexzilla Grease Hose - 42 in.
- (2) 20V Lithium-Ion Rechargeable Batteries
- 1-Hour Quick Charger
- Automatic Air Bleeder
- 4-Jaw Coupler
- Shoulder Strap
- Carrying Case

Part No.	Description	Retail Packaging
L1388LFZ	Flexzilla® 20V Cordless Grease Gun Kit	●
L1388LFZ-B	Flexzilla® 20V Lithium-Ion Rechargeable Battery for L1388LFZ	●
L1388LFZ-C	Flexzilla® 20V Lithium-Ion 1-Hour Quick Charger for L1388LFZ-B	●

Lever Action Grease Gun

The highest standards of engineering and craftsmanship are built into every Flexzilla® Grease Gun making them the choice for those who work in rugged conditions. Flexzilla Grease Hoses are more flexible than traditional rubber or thermoplastic hoses and stay flexible, even in subzero temperatures.

Heavy Duty Lever Action Grease Gun - Variable Stroke



L1355FZ

FEATURES:

- Flexzilla 18 in. Grease Hose – Extreme cold-weather flexibility (subzero to 140°F)
- Soft Barrel Grip – Provides better ergonomic control and comfort
- Heavy-Duty Cast Head Construction – For maximum durability and longer service life
- Durable Follower Rod And Spring – For consistent priming
- Bleeder Valve – For purging unwanted air
- Variable Stroke – Allows grease delivery in confined areas
- 4-Jaw Coupler – Provides quality connection, disconnection, and sealing to zerk
- 3-Way Loading – Cartridge, bulk, filler nipple
- Wide Grip Clearance
- Holds 14 oz. Grease Cartridge
- Includes 6 in. rigid extension

Part No.	Retail Packaging
----------	------------------

L1355FZ	●
---------	---



Grease Hoses

FEATURES:

- Extreme cold-weather flexibility
- 10,000 psi working pressure
- For use with manual, battery or air operated grease guns
- Coupler sold separately



L2915FZ



L2915FZSP



L2915FZSP

Part No.	Description	Hose I.D.	Hose Length	MNPT Fitting	Spring Guard	Retail Packaging
L2910FZ	Flexzilla® 12" Grease Hose	3/16 in.	12 in.	1/8 in.	–	●
L2910FZSP	Flexzilla® 12" Grease Hose w/ Spring Guard	3/16 in.	12 in.	1/8 in.	Yes	●
L2915FZ	Flexzilla® 18" Grease Hose	3/16 in.	18 in.	1/8 in.	–	●
L2915FZSP	Flexzilla® 18" Grease Hose w/ Spring Guard	3/16 in.	18 in.	1/8 in.	Yes	●
L2925FZ	Flexzilla® 36" Grease Hose	3/16 in.	36 in.	1/8 in.	–	●
L2925FZSP	Flexzilla® 36" Grease Hose w/ Spring Guard	3/16 in.	36 in.	1/8 in.	Yes	●
L2930FZSP	Flexzilla® 42" Grease Hose w/ Spring Guard	3/16 in.	42 in.	1/8 in.	Yes	●
L2950FZ	Flexzilla® 12" Grease Hose	1/8 in.	12 in.	1/8 in.	–	●
L2950FZSP	Flexzilla® 12" Grease Hose w/ Spring Guard	1/8 in.	12 in.	1/8 in.	Yes	●
L2955FZ	Flexzilla® 18" Grease Hose	1/8 in.	18 in.	1/8 in.	–	●
L2955FZSP	Flexzilla® 18" Grease Hose w/ Spring Guard	1/8 in.	18 in.	1/8 in.	Yes	●
L2965FZ	Flexzilla® 36" Grease Hose	1/8 in.	36 in.	1/8 in.	–	●
L2965FZSP	Flexzilla® 36" Grease Hose w/ Spring Guard	1/8 in.	36 in.	1/8 in.	Yes	●

PLAN-O-GRAMS

ONE-STOP SHOP

All the high-performance tools you need for that big project in one spot.

ELEX **TUCA**
Premium hoses, coils & attachments

Water Hoses, Reels and Assorted Products



Items Shown:

- Garden Hose Nozzle Kits
- Pro Water Hose Nozzles
- Garden Lead-in Hoses
- Pressure Washer Hoses
- SwivelGrip™ Garden Hoses
- Garden Hoses
- Garden Hose Kits with Quick Connect Attachments
- Pro Water Hoses – Field Repairable
- Water Hose Reels



Items Shown:

- Colors™ SwivelGrip™ Garden Hoses
- Available in Colors:
 - Brown Mulch
 - Red Clay

Greasing Equipment, Blow Guns and Assorted Products



Items Shown:

- Grease Hoses
- Grease Guns – Lever Action
- Grease Guns – 20V Cordless Kit



Items Shown:

- Blow Guns and Kits
- Extension Cords
- 11-Piece Air Hose Compressor Kits
- Truck Tire Inflator Kits
- Air Hose Reels with Levelwind™ Technology
- Extension Cord Reels

Air Tool Kits, Hose and Assorted Products



Items Shown:

- Recoil Hoses
- Whip Hoses
- Tire Inflators
- High Flow Couplers and Plugs
- Reusable Fittings and Splicers
- Air Hoses
- Pro Air Hoses – Field Repairable
- Air Hose Reels
- Extension Cord Reels



Items Shown:


- High Flow Couplers and Plugs
- Custom Length Whip Hoses
- Reciprocating Mini Air Ratchet Kits
- Reactionless Mini Air Saw Kits
- Mini Impact Wrench Kits
- Pro Air Hoses – Field Repairable

Custom Hose Centers



Items Shown:


- Reusable Fittings and Splicers
- Bulk Air Hose
- Bulk Water Hose

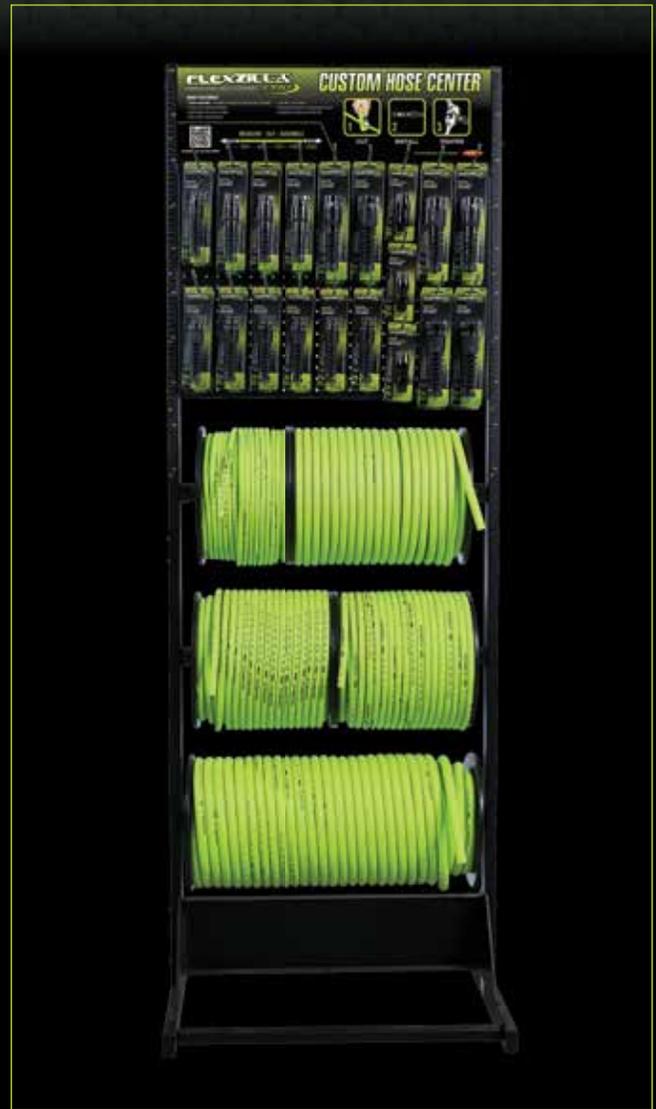

Items Shown:

- Reusable Fittings and Splicers
- Bulk Air Hose
- Bulk Water Hose

Custom Hose Center

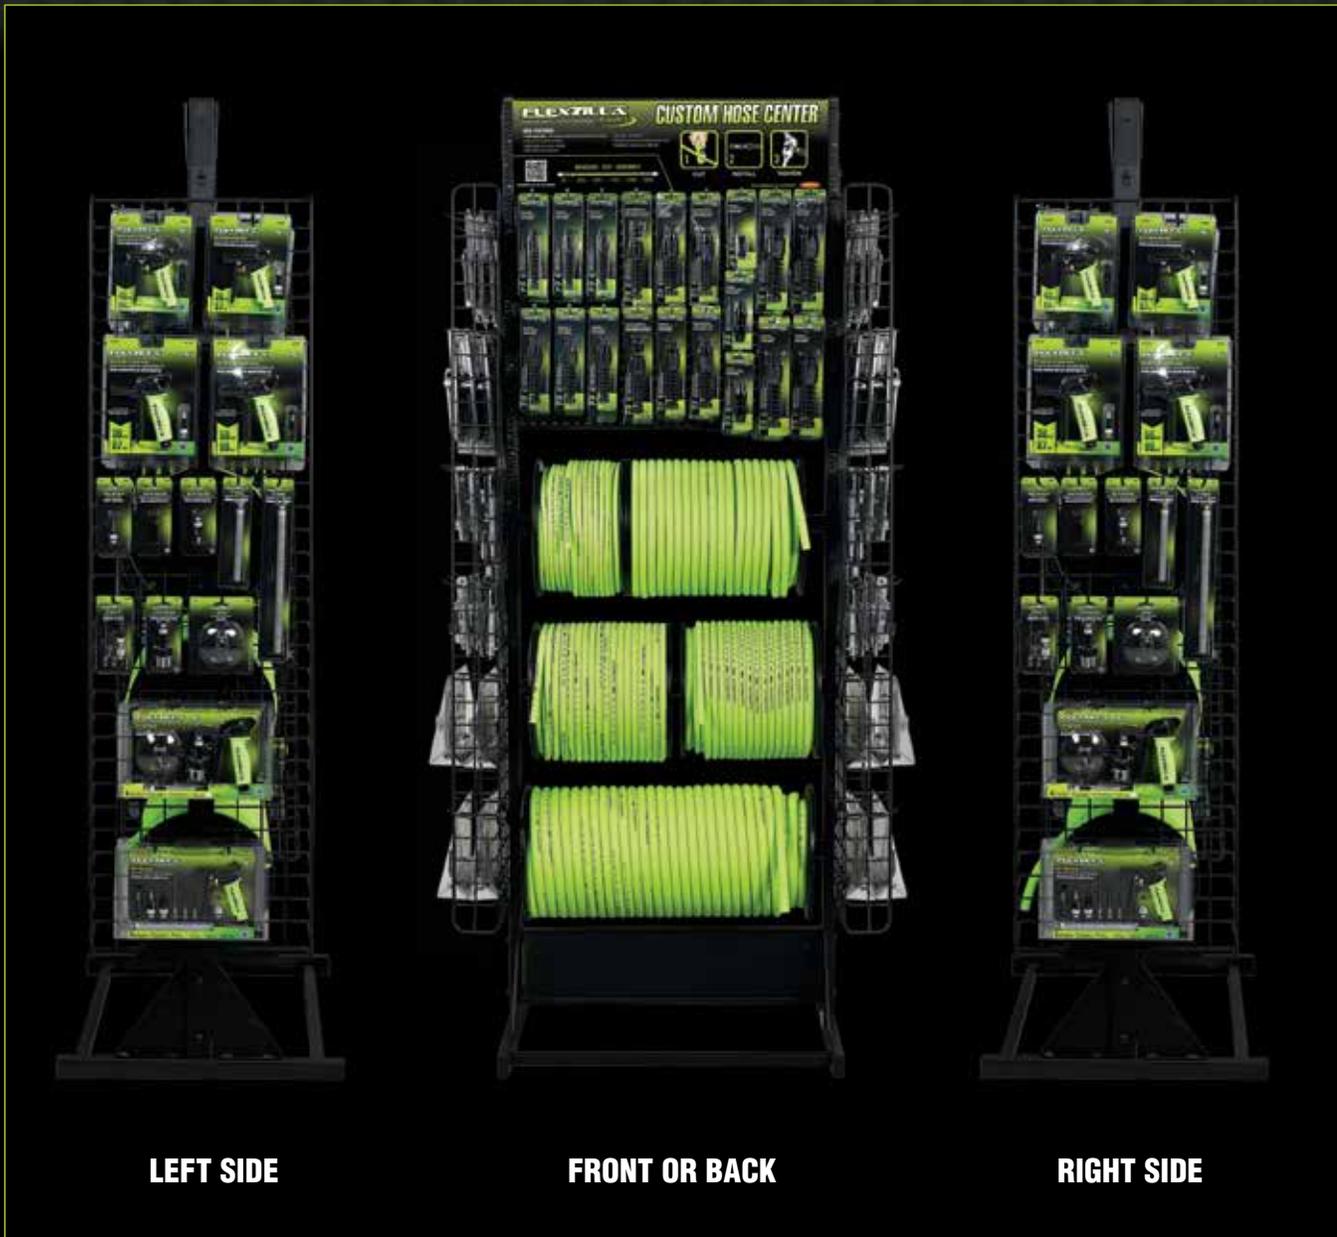

Items Shown:

- Reusable Fittings and Splicers
- Bulk Air Hose
- Bulk Water Hose
- Blow Guns and Accessories

Part No.	Pg.	Part No.	Pg.	Part No.	Pg.	Part No.	Pg.
A5	11	AG1202FZ	33	HFZ14100YW2-D-10X	9	HFZG510YW	44
A5-1	11	AG1402FZ	33	HFZ14250YW	14, 15	HFZG510YWS	42
A5-2	11	AG1500FZKIT	33	HFZ1425YW2	8	HFZG510YWS	48
A5-3	11	AG1502FZ	33	HFZ1425YW2-D	9	HFZG510YWS-6X	42
A53000FZK1	31	AG934FZ	34	HFZ1450YW2	8	HFZG525YW	44
A53416FZ	30	AL2000FZ	40	HFZ1450YW2-10X	8	HFZG525YWS	42
A53416FZ-X	30	AL2025FZ-1	40	HFZ1450YW2-D	9	HFZG550YW	44
A53426FZ	30	AL2025FZ-2	40	HFZ1450YW2-D-10X	9	HFZG550YWS	42
A53426FZ-X	30	AT1475FZ	36	HFZ34250YW	15	HFZG575YW	44
A53430FZ-2PK	30	AT8500FZ	38	HFZ3802YW2B	10	HFZG575YWS	42
A53430FZ-X	30	AT8505FZ	36	HFZ3804YW2B	10	HFZG6100YW	44
A53440FZ-2PK	30	AT8530FZ	38	HFZ3805YW2B	10	HFZG650YW	44
A53440FZ-8PK-N	31	AT8535FZ	37	HFZ3806YW2B	10	HFZG675YW	44
A53440FZBS	30	AT8565FZ	37	HFZ38100YW2	8	HFZGAK01	45
A53440FZBS-X	30	E8140503	55	HFZ38100YW2-D	9	HFZGAK02	45
A53440FZ-X	30	FZ512725	54	HFZ38250YW	14, 15	HFZGSQTR1 *	42
A53452FZ	31	FZ512730	54	HFZ3825YW2	8	HFZP1406YW2B	17
A53457FZ	31	FZ512735	54	HFZ3825YW2-10X	8	HFZP14100YW2	16
A53458FZ	31	FZ512825	54	HFZ3825YW2-D	9	HFZP14100YW2-D	17
A53616FZ	30	FZ512830	54	HFZ3835YW2	8	HFZP14100YW2-D-8X	17
A53616FZ-X	30	FZ512835	54	HFZ3835YW2-D	9	HFZP1425YW2	16
A53626FZ	30	FZ512930	54	HFZ3850YW2	8	HFZP1425YW2-D	17
A53626FZ-X	30	FZ512935	54	HFZ3850YW2-10X	8	HFZP1450YW2	16
A53630FZ-2PK	30	HFZ01250YW	15	HFZ3850YW2-D	9	HFZP1450YW2-D	17
A53630FZ-X	30	HFZ1202YW3S	10	HFZ3850YW3	8	HFZP1450YW2-D-10X	17
A53640FZ-2PK	30	HFZ1202YW4S	10	HFZBRP1	13, 14	HFZP3806YW2B	17
A53640FZ-X	30	HFZ1204YW3S	10	HFZBRP3	13, 14	HFZP38100YW2	16
A53657FZ	31	HFZ1204YW4S	10	HFZC550BRS	43	HFZP38100YW2-D	17
A5-4	11	HFZ1206YW3S	10	HFZC550TCS	43	HFZP3825YW2	16
A5-8	11	HFZ1206YW4S	10	HFZC58250BRS	48	HFZP3825YW2-D	17
A86666FZ	31	HFZ1208YW3S	10	HFZC58250TCS	48	HFZP3835YW2	16
AG1006FZ	34	HFZ1208YW4S	10	HFZCBRP3	47, 48	HFZP3850YW2	16
AG1012FZ	34	HFZ12100YW3	8	HFZCLB11D	10	HFZP3850YW2-D	17
AG1016FZ-N	34	HFZ12100YW4	8	HFZCSQTR1 *	43	HFZP3850YW2-D-8X	17
AG1090FZ	34	HFZ12250YW	14, 15	HFZG12050QN	45	HFZPW3425M	50
AG1091FZ	34	HFZ1225YW3	8	HFZG503YW	44	HFZPW3425M-5X	50
AG1092FZ	34	HFZ1250YW3	8	HFZG503YWS	48	HFZPW3450M	50
AG1093FZ	34	HFZ1250YW4	8	HFZG503YWS	42	HFZPW3450M-3X	50
AG1099FZ	34	HFZ1405YW2B	10	HFZG505YW	44	HFZPW3525M	50
AG1102FZ	33	HFZ14100YW2	8	HFZG5100YW	44	HFZPW3525M-5X	50
AG1200FZKIT	33	HFZ14100YW2-D	9	HFZG5100YWS	42	HFZPW3550M	50

INDEX

Part No.	Pg.
HFZPW3550M-3X	50
HFZW58250YW	14, 15, 48
HFZWHC1	47, 48
HFZWP5100	48
HFZWP550	48
HFZWP575	48
HGH2-FZ	42
L1355FZ	58
L1388LFZ	57
L1388LFZ-B	57
L1388LFZ-C	57
L2910FZ	58
L2910FZSP	58
L2915FZ	58
L2915FZSP	58
L2925FZ	58
L2925FZSP	58
L2930FZSP	58
L2950FZ	58
L2950FZSP	58
L2955FZ	58
L2955FZSP	58
L2965FZ	58
L2965FZSP	58
L8011FZ	23
L8011FZLI	27
L8041FZ	23
L8041FZLI	27
L8230FZ	20
L8250FZ	20
L8250FZLI	27
L8300-B	19, 49
L8300-W	19, 49
L8305FZ	19
L8305FZLI	27
L8306FZ	19
L8335FZ	19
L8335FZLI	27
L8340FZ	49
L8550FZ	24
L8560FZ	24

Part No.	Pg.
L8603FZ	21
L8611FZ	21
L8611FZLI	27
L8650FZ	25
L8651FZ	26
L8651FZLI	27
L8652FZ	25
L8654FZ	26
L8654FZLI	27
L8711FZ	22
L8741FZ	22
LP1410AFZ	11
LP1415AFZ	11
LP1420AFZ	11
LP1425AFZ	11
NFZG01-N	48
NFZG02-N	48
PW1013	52
PW1015	52
PW1020	52
PW2000	52
PW2305	52
PW3002	51
PW3003	51
PW3004	51
PW3005	51
PW3021	51
PW3023	51
PW3032	51
PW3500	51
PW3510	51
PW3511	51
PW3520	51
PW3530	51
PW3531	51
PW3560	51
PW3570	51
PW3571	51
PW3580	51
PW3590	51
PW3591	51

Part No.	Pg.
PW4000	52
RP900250	14, 15
RP900250BS	14, 15
RP900250S	15
RP900375	14, 15
RP900375BS	14, 15
RP900375S	15
RP900500	14, 15
RP900500S	14, 15
RP900625F	14, 15, 48
RP900625M	14, 15, 48
RP901250	14, 15
RP901375	14, 15
RP901500	14, 15



SEE FLEXZILLA® IN ACTION!

View our product videos online!

 [flexzilla.com](https://www.flexzilla.com)

 [youtube.com/flexzilla](https://www.youtube.com/flexzilla)

Videos available upon request



Legacy Manufacturing Company

6509 Partners Ave
Marion, IA 52302
phone: 319-373-7305
toll-free: 800-645-8258
email: info@flexzilla.com
legacymfg.com
flexzilla.com

See Flexzilla in Action!



Visit Legacy...



Published: November 1, 2018

Flexzilla is a registered trademark of Weems Industries, Inc.
The color CHARTREUSE is a trademark owned by Weems Industries, Inc., including but not limited to U.S. Reg. Nos. 4,827,169 & 5,293,921.
Lock-n-Load: U.S. Pat. No. 8,297,476 B2 and Canadian Pat. No. 02743126
ColorConnex: U.S. Pat. No. 7,980,599 & 8,430,431 and Canadian Registration No. 2,575,170

Copyright © 2018 Legacy Manufacturing Co. All Rights Reserved.