

SuperAssilex DISCS SHEETS

In today's new painting technology that has less and less tolerance, deep scratches and over-sanding become a big concern...

Introducing *Super Assilex*

Fast and Uniform coverage with extremely shallow scratches, resulting from the combination of Ultra Flexible bonding and Super Sharp abrasives. Ideal for light sanding on all types of surfaces that demand shallow scratches, uniform finish and still can be done in the shortest time.

- Perfect for Blending, Light Scuffing and Primer Finishing
- Extremely shallow scratch pattern, safe from "over-sanding"
- Fast and uniform coverage, leaves no unsanded areas
- Time saving of 50% or more, thus greatly improves productivity



Recommended Air Tools


Part No.	Description	Weight	Speed	Orbit Diameter	Air Consumption	Air Pressure
910-0202	BA Sander	1.60 lbs	8,500 rpm	3 mm	12.0 CFM	58-87 psi
910-0603	PROMA-X 6" DA Sander	1.91 lbs	12,000 rpm	3/16"	17.0 CFM	90 psi
910-0600	PROMA-X 6" DA Vac. Sander (7 or 15 Holes)	1.94 lbs	12,000 rpm	3/16"	17.0 CFM	90 psi
910-7501	3" DA Sander	1.40 lbs	15,000 rpm	3 mm	14.0 CFM	90 psi
910-0102	6" DA Sander	1.98 lbs	10,000 rpm	5 mm	13.4 CFM	57-87 psi
910-0102D	6" DA Vac. Sander (7 Holes)	2.05 lbs	8,500 rpm	5 mm	13.4 CFM	57-87 psi



Achieving quality through consistency. Manufactured by Kovax Corporation, Japan

ADVANTAGES

- Fast and uniform coverage, leaves no unsanded areas.
- Extremely shallow scratch pattern, safe from "over-sanding."
- Flexible contact, ideal for concaved and convexed areas.
- No scuffing compounds needed, no color residue to clean up.
- Time saving of 50% or more, thus greatly improves productivity.

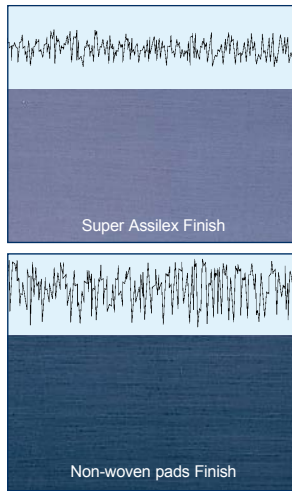

USAGE

- Ideal for light sanding on all types of surfaces that demand shallow scratches and a uniform finish.
- Light scuffing on primer surfacer before painting.
- Scuffing on ED primer coat of new parts.
- Blending between repaired and non-repaired areas.
- Scuffing old paint or bumpers before painting.
- Removes wax, incrustations, dirt and dust.

Part No.	Item	K No.	Size	*Speed Equivalent	**Finish Equivalent		Pcs. per Unit
					Manual	Machine	
Super Assilex Sheets							
191-2517	Super Assilex Brown	K-240	170 x 130 mm	±P150	>P240	>P280	25
191-1515	Super Assilex Ocean	K-360	170 x 130 mm	±P240	>P360	>P400	25
191-1508	Super Assilex Sky	K-600	170 x 130 mm	±P320	>P600	>P800	25
191-1509	Super Assilex Lemon	K-800	170 x 130 mm	±P600	>P800	>P1000	25
191-2507	Super Assilex Lime	K-1000	170 x 130 mm	±P800	>P1000	>P1200	25
191-1510	Super Assilex Orange	K-1200	170 x 130 mm	±P1000	>P1200	>P1500	25
191-2505	Super Assilex Peach	K-1500	170 x 130 mm	±P1200	>P1500	>P2000	25
971-0025	Super Assilex Pad M 75 x 120 x 7mm (Soft Hand Foam Pad)						4
971-0094	Super Assilex Pad M 78 x 123 x 7mm (Hard Hand Foam Pad)						4
971-00948	Super Assilex Pad M 70 x 125 x 5mm (Extra Hard for Brown and Ocean)						1
971-0026	Super Assilex Pad L 100 x 150 x 10mm (Soft Hand Foam Pad - Full Sheet)						2
971-00268	Super Assilex Pad LS 120 x 150 x 10mm (Interface Pad - Full Sheet)						2
00463	IPC Band 1" x 6" (for Velour Backing Interface Pads)						2
Super Assilex Foam Block System							
00212	Super Assilex Foam Block		65 x 120 x 35mm				1
971-0035	Assilex Interface Pad		75 x 120 x 7mm (For use with 00212 & 910-0202)				4
6" Super Assilex Discs (7 Holes)							
193-2557	Super Assilex Brown	K-240	6" Dia.	±P150	>P240	>P280	25
193-1545	Super Assilex Ocean	K-360	6" Dia.	±P240	>P360	>P400	25
193-1538	Super Assilex Sky	K-600	6" Dia.	±P320	>P600	>P800	25
193-1539	Super Assilex Lemon	K-800	6" Dia.	±P600	>P800	>P1000	25
193-2547	Super Assilex Lime	K-1000	6" Dia.	±P800	>P1000	>P1200	25
193-1540	Super Assilex Orange	K-1200	6" Dia.	±P1000	>P1200	>P1500	25
193-2545	Super Assilex Peach	K-1500	6" Dia.	±P1200	>P1500	>P2000	25
971-0049	6" Intfc. Cushion Pad	6" Dia. - Hard type (for Brown and Ocean), 7 Holes				2	
971-0039	6" Intfc. Cushion Pad	6" Dia. - Soft type (for Sky, Lemon, Lime, Orange & Peach), 7 Holes				2	
971-7054	6" Intfc. Cushion Pad	6" Dia. - Extra Soft type (for Additional Cushioning), 7 Holes				1	
971-9002	6" Intfc. Cushion Pad	6" Dia. - Assorted (1 pad ea. of 971-0039 & 971-0049), 7 Holes				2	
6" Super Assilex Discs (15 Holes)							
193-2537	Super Assilex Brown	K-240	6" Dia.	±P150	>P240	>P280	25
193-1575	Super Assilex Ocean	K-360	6" Dia.	±P240	>P360	>P400	25
193-1578	Super Assilex Sky	K-600	6" Dia.	±P320	>P600	>P800	25
193-1579	Super Assilex Lemon	K-800	6" Dia.	±P600	>P800	>P1000	25
193-2527	Super Assilex Lime	K-1000	6" Dia.	±P800	>P1000	>P1200	25
193-1580	Super Assilex Orange	K-1200	6" Dia.	±P1000	>P1200	>P1500	25
193-2525	Super Assilex Peach	K-1500	6" Dia.	±P1200	>P1500	>P2000	25
971-0057	6" Intfc. Cushion Pad	6" Dia. - Hard type (for Brown and Ocean), 15 Holes				2	
971-0091	6" Intfc. Cushion Pad	6" Dia. - Soft type (for Sky, Lemon, Lime, Orange & Peach), 15 Holes				2	
971-9001	6" Intfc. Cushion Pad	6" Dia. - Assorted (1 pad ea. of 971-0091 & 971-0057), 15 Holes				2	
3" Super Assilex Discs (One Super Assilex Interface Pad part no. 971-7503 included with each box)							
730-2510	Super Assilex Sky	K-600	3" Dia.	±P320	>P600	>P800	50
730-2508	Super Assilex Lemon	K-800	3" Dia.	±P600	>P800	>P1000	50
730-2507	Super Assilex Orange	K-1200	3" Dia.	±P1000	>P1200	>P1500	50
971-7503	3" Intfc. Cushion Pad	3" Dia. - Soft type (for Sky, Lemon, Orange)				4	

SuperAssilex



*Speed Equivalent: Time required to sand and completely cover a given area is equivalent to the speed of above grade number in traditional abrasive paper. (Because "depth of sanding scratches" differ from product to product, the above guide is not necessarily equivalent to speed of material removal in volume). **Finish Equivalent: The effort required to polish the finish of referenced products is equivalent to a finish left behind by above grade number.